

IOWA STATE UNIVERSITY

Digital Repository

Chemical and Biological Engineering Publications

Chemical and Biological Engineering

10-10-2016

Recovery and Utilization of Lignin Monomers as Part of the Biorefinery Approach

Kirsten M. Davis

Iowa State University, kirstdav@iastate.edu

Marjorie Rover

Iowa State University, mrrover@iastate.edu

Robert C. Brown

Iowa State University, rcbrown3@iastate.edu

See next page for additional authors

Follow this and additional works at: http://lib.dr.iastate.edu/cbe_pubs



Part of the [Biological Engineering Commons](#), and the [Chemical Engineering Commons](#)

The complete bibliographic information for this item can be found at http://lib.dr.iastate.edu/cbe_pubs/303. For information on how to cite this item, please visit <http://lib.dr.iastate.edu/howtocite.html>.

This Article is brought to you for free and open access by the Chemical and Biological Engineering at Iowa State University Digital Repository. It has been accepted for inclusion in Chemical and Biological Engineering Publications by an authorized administrator of Iowa State University Digital Repository. For more information, please contact digirep@iastate.edu.

Recovery and Utilization of Lignin Monomers as Part of the Biorefinery Approach

Abstract

Lignin is a substantial component of lignocellulosic biomass but is under-utilized relative to the cellulose and hemicellulose components. Historically, lignin has been burned as a source of process heat, but this heat is usually in excess of the process energy demands. Current models indicate that development of an economically competitive biorefinery system requires adding value to lignin beyond process heat. This addition of value, also known as lignin valorization, requires economically viable processes for separating the lignin from the other biomass components, depolymerizing the lignin into monomeric subunits, and then upgrading these monomers to a value-added product. The fact that lignin's biological role is to provide biomass with structural integrity means that this heteropolymer can be difficult to depolymerize. However, there are chemical and biological routes to upgrade lignin from its native form to compounds of industrial value. Here we review the historical background and current technology of (thermo) chemical depolymerization of lignin; the natural ability of microbial enzymes and pathways to utilize lignin, the current prospecting work to find novel microbial routes to lignin degradation, and some applications of these microbial enzymes and pathways; and the current chemical and biological technologies to upgrade lignin-derived monomers.

Keywords

valorization, depolymerization, laccase, aromatic, pyrolysis, organosolv

Disciplines

Biological Engineering | Chemical Engineering

Comments

This article is published as Davis, Kirsten M., Marjorie Rover, Robert C. Brown, Xianglan Bai, Zhiyou Wen, and Laura R. Jarboe. "Recovery and utilization of lignin monomers as part of the biorefinery approach." *Energies* 9, no. 10 (2016): 808. [10.3390/en9100808](https://doi.org/10.3390/en9100808). Posted with permission.

Creative Commons License



This work is licensed under a [Creative Commons Attribution 4.0 License](https://creativecommons.org/licenses/by/4.0/).

Authors

Kirsten M. Davis, Marjorie Rover, Robert C. Brown, Xianglan Bai, Zhiyou Wen, and Laura R. Jarboe

Review

Recovery and Utilization of Lignin Monomers as Part of the Biorefinery Approach

Kirsten M. Davis ¹, Marjorie Rover ², Robert C. Brown ³, Xianglan Bai ³, Zhiyou Wen ⁴ and Laura R. Jarboe ^{1,*}

¹ Chemical and Biological Engineering, Iowa State University, Ames, IA 50014, USA; kirstdav@iastate.edu

² Bioeconomy Institute, Iowa State University, Ames, IA 50014, USA; mrrover@iastate.edu

³ Mechanical Engineering, Iowa State University, Ames, IA 50014, USA; rcbrown3@iastate.edu (R.C.B.); bxl9801@iastate.edu (X.B.)

⁴ Food Science & Human Nutrition, Iowa State University, Ames, IA 50014, USA; wenz@iastate.edu

* Correspondence: ljarboe@iastate.edu; Tel.: +1-515-294-2319

Academic Editor: Dimitris S. Argyropoulos

Received: 15 June 2016; Accepted: 22 September 2016; Published: 10 October 2016

Abstract: Lignin is a substantial component of lignocellulosic biomass but is under-utilized relative to the cellulose and hemicellulose components. Historically, lignin has been burned as a source of process heat, but this heat is usually in excess of the process energy demands. Current models indicate that development of an economically competitive biorefinery system requires adding value to lignin beyond process heat. This addition of value, also known as lignin valorization, requires economically viable processes for separating the lignin from the other biomass components, depolymerizing the lignin into monomeric subunits, and then upgrading these monomers to a value-added product. The fact that lignin's biological role is to provide biomass with structural integrity means that this heteropolymer can be difficult to depolymerize. However, there are chemical and biological routes to upgrade lignin from its native form to compounds of industrial value. Here we review the historical background and current technology of (thermo) chemical depolymerization of lignin; the natural ability of microbial enzymes and pathways to utilize lignin, the current prospecting work to find novel microbial routes to lignin degradation, and some applications of these microbial enzymes and pathways; and the current chemical and biological technologies to upgrade lignin-derived monomers.

Keywords: valorization; depolymerization; laccase; aromatic; pyrolysis; organosolv

1. Introduction

Lignocellulosic biomass includes a wide variety of plant material, such as crops, agricultural residue, and wood. Humankind has utilized biomass throughout history to produce: heat for warmth and cooking; biochemicals, such as the ethanol and lactic acid produced by fermentation; and biofibers, such as those used in clothing and other textiles [1]. Present-day utilization of lignocellulosic biomass instead of petroleum in the production of chemicals and fibers could contribute to the improvement of environmental quality, national security, and rural economic development [1].

One component of lignocellulosic biomass, lignin, has long been viewed as a low-value or waste product in the wood pulping industry. The most common pulping process is the Kraft process, where lignin is dissolved in hot sodium hydroxide and sodium sulfide [2]. The top three pulping processes are the Kraft process, the sulfite process, and the soda lignin process. These three processes produce 60–100 Ktonnes of Kraft lignin, 1 Mtonne of lignosulfonates, and 5–10 Ktonnes of Sulfur-free soda lignin per year, respectively [3]. Typically, lignin is used as a fuel to fire pulping boilers [4]. However, the energy produced through lignin combustion is about sixty percent greater than the demand [5]. Traditionally, only 1%–2% of lignin was isolated from pulping liquors and used for specialty products,

such as dispersants or binders [6]. It follows that lignin has also been combusted as an energy source in the conversion of biomass to ethanol [7].

There is a vast collection of literature on lignin processing, including improving the recovery of lignin from biomass, depolymerization of lignin into monomers by chemical and/or biological means, and upgrading of the depolymerized lignin monomers to industrially relevant chemicals, which have been described in several other recent reviews (Figure 1) [2,5,8,9]. The purpose of this review is to summarize strategies from each of these processing steps and to briefly describe their economic relevance.

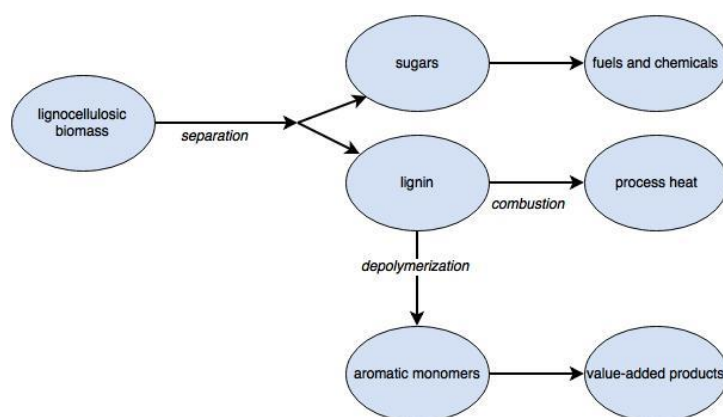


Figure 1. The lignin polymer can be processed via combustion, chemical processing, thermochemical processing, biological processing or a combination of these routes. This review covers chemical, thermochemical, and biological processing of depolymerized lignin to produce industrially relevant chemicals.

2. Lignin Structure and Abundance

Lignin is a stable aromatic heteropolymer that accounts for 10–35 wt% of lignocellulosic biomass [8]. Table 1 details the variation of lignin content in various lignocellulosic biomass types. Lignin is the second most abundant terrestrial polymer after cellulose, and it is the only large-volume renewable source of aromatics [10,11]. In nature, lignin functions as a matrix that holds the plant together and provides protection from environmental factors. The properties of lignin that benefit the plant are also the properties that make lignin difficult to access and convert to industrially relevant products. Although the structure and composition of lignin vary from plant to plant, during lignin production, the three primary lignin monomers coniferyl alcohol, sinapyl alcohol, and *p*-coumaryl alcohol are subject to polymerization so that the resulting lignin polymer is comprised of three phenylpropanoid monomeric units guaiacyl (G), syringyl (S), and *p*-hydroxyphenyl (H) (Figure 2) [12,13].

Table 1. Lignin content in lignocellulosic crops.

Biomass Category	Biomass Type	Lignin Content (wt%)
Softwood	Pine	28 [14]
	Poplar	21–27 [15]
Hardwood	Eucalyptus	29–32 [16]
	Miscanthus	9–13 [17]
	Switchgrass	17–18 [18]
Herbaceous	Corn Stover	18 [19]
	Bagasse	20 [20]

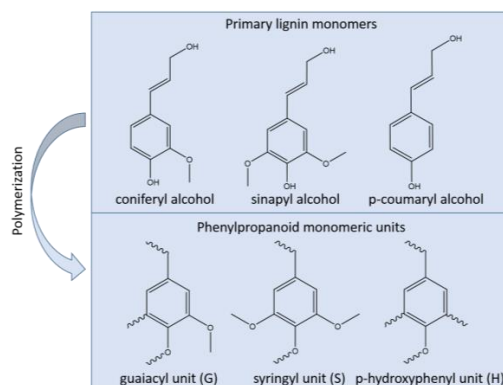


Figure 2. Primary lignin monomers are hydroxycinnamyl alcohols which are known as monolignols. These primary lignin monomers are polymerized. The corresponding phenylpropanoid monomeric units in the lignin polymer are guaiacyl units (G), syringyl units (S), and p-hydroxyphenyl units (H), respectively, which can be polymerized at any of the wavy bond positions [12,13].

3. Challenges and Progress in Lignin Recovery

Lignin is recalcitrant and has a heterogeneous structure. In addition, the separation of lignin from biomass can be energy intensive and sometimes requires harsh chemicals. The lignin isolation methods in Table 2 use combinations of acid/base chemistry, high temperatures and pressures, solvents, and catalysts.

3.1. Pulping Processes

Kraft pulping is the dominant pulping process, with about 90% share of the total global production capacity, while less than 10% of pulp is produced by sulfite pulping and less than 5% by sulfur free alkali pulping [2,21]. In the Kraft process, cellulose is isolated from hemicellulose and lignin using sodium hydroxide and sodium sulfide. The heating value of the hemicellulose and lignin in the by-product liquor is high: 14–16 MJ/kg on a dry basis [22]. A chemical produced from the lignin in the black liquor needs to be of sufficient value to compensate for this loss of possible heat energy or only excess lignin should be diverted from process heat production [2].

Table 2. Non-biological lignin recovery methods.

Recovery Methods	Benefits	Challenges	Products
Kraft [23] and sulfite pulping [21]	Well-developed	Harsh chemicals	Cellulose, hemicellulose/lignin
Sulfur free alkali (soda) pulping [24]	Sulfur-free	Lower lignin removal rate	Solid polysaccharides, lignin-rich liquid
Organosolv pulping [25]	Sulfur-free	Has not been adapted to production scale	Varies by process, some organosolv processes can essentially isolate cellulose, hemicellulose, and lignin
Fast pyrolysis [26]	Fast	Undesired char formation	Solid (bio-char), Liquid (bio-oil), and gas
Dilute acid hydrolysis [27]	Highly advanced	Solid product is acid insoluble	Monomeric sugars, Biofine ligneous char (high heating value)
Hydrothermal Fractionation [28,29]	High product selectivity, produces monomeric products	Separation of hydrogen catalyst from the wood residue is challenging	Aromatic monomers, hydrolyzed hemicellulose
Biphasic fractionation [30]	Lower temperatures, near atmospheric pressure	Toxic solvents used in some cases	Hemicellulose degradation products (such as C ₅ oligomers, furfural), Cellulose solid, and lignin fragments

Organosolv pulping uses low-boiling, organic solvents (typically sulfur free) for delignification. Commonly used solvents for organosolv are ethanol, methanol, organic acids, and mixed organic solvent–non organic alkali. Organosolv pulping is more environmentally benign than Kraft and sulfite pulping, and it allows for almost complete separation of cellulose, hemicellulose, and lignin. Research activities on organosolv biomass fractionation are increasing, but there is not a full-scale process to date [2].

3.2. Thermochemical Depolymerization of Biomass

Pyrolysis is the heating of biomass in the absence of oxygen. Fast pyrolysis converts biomass to a liquid (bio-oil), gas, and solid (char) product at moderately high temperatures (up to 500 °C). Up to 75% of the pyrolysis product is bio-oil, which contains compounds of similar structure to the original molecules [2]. However, there are a lower number of methoxyl groups on the pyrolytic lignin compared to the native milled wood lignin which is likely caused by demethoxylation of guaiacyl and syringyl moieties to form methanol [31]. The carbohydrate-derived compounds in the bio-oil have a higher affinity for water than the lignin-derived compounds. Therefore, separation of the lignin component can be done with water, controlled deposition, or solvent extraction [2,32–34]. Biomass pyrolysis also produces a solid, known as bio-char, that can be used as a soil amendment for carbon sequestration and to improve crop production [35,36].

3.3. Dilute Acid Hydrolysis

In the dilute acid hydrolysis process known as the Biofine process, shredded biomass is added to dilute sulfuric acid. Then the product is subject to two stages of dilute acid treatment at high temperatures to hydrolyze polysaccharides into their monomeric units. A solid called Biofine char is produced, which has a very high heating value of 26 MJ/kg and is mainly comprised of ligneous type components according to thermogravimetric-Fourier Transform infrared spectroscopy (TG-FTIR). The Biofine process is highly advanced in the processing of polysaccharides. The polysaccharides are converted into levulinic acid, formic acid, and furfural. However, the use of the Biofine char has limited applications because it is acid insoluble [2,27].

3.4. Hydrothermal Fractionation

Hydrothermal fractionation is the heating of wood in hot-compressed water (200 °C and moderate hydrogen pressure) in the presence of a hydrogenation catalyst [2,29]. The main products are the lignin-derived aromatic monomers propyl guaiacol, propyl syringol, guaiacyl propanol, syringyl propanol, and also hydrolyzed hemicellulose, which all remain in the aqueous phase. The advantage of hydrothermal fractionation is good product selectivity. However, it can be difficult to separate the hydrogenation catalyst from the wood residue [2].

3.5. Biphasic Fractionation

Biphasic fractionation can be used to separate the cellulose, hemicellulose, and lignin from each other. Solvents that have been applied to the organic phase include phenol [37–39], cresol [40], lignin-derived phenolic mixtures [41], polyethylene glycol [42–45], and 2-methyltetrahydrofuran [46]. The hemicellulose components can be extracted by the aqueous phase, the lignin components can be extracted by the organic phase, and the cellulose can precipitate as a solid. Although biphasic fractionation is advantageous because it can be carried out at lower temperatures and near atmospheric pressure, the toxicity of some of the solvents could pose a challenge [2].

3.6. Modeling of Lignin Isolation

There is no precise equation for the amount of lignin extracted relative to the “severity” of treatment [47]. In 1987, an equation for the severity was proposed that depended on two parameters:

temperature and time [48]. However, the equation was intended to estimate the impact of the treatment on the hemicellulose fraction of the biomass and not the lignin fraction, and there was no direct correlation between extracted lignin and the severity factor. In addition, the equation was not applicable for temperatures lower than 100 °C and it had limitations for catalyst usage. In 1990 and 2007, the severity factor was modified to reflect the effect of acid and base respectively on the severity factor, but the equation had to be modified by a factor of n depending on whether an acid or base was being used [49,50]. A recent study proposed an improved model that is universal for both acid and base treatments, and shows good correlation for one- and two-shot steam explosion, hot alkali macerations, and Kraft pulping with different types of biomass [47].

4. Lignin Utilization in Nature

In nature, lignin is utilized by specialized microorganisms encoding metabolic pathways that can break down components of lignin. Microorganisms that can break down lignin are able to use it as a carbon and energy source for metabolite production and have an advantage over biological organisms that can only utilize the cellulose and hemicellulose components of lignocellulosic biomass. Throughout this review, the phrases model lignin and lignin model compounds will be used. Researchers often use lignin model compounds when investigating what types of products can be produced using biological or chemical catalysis. Lignin model compounds have similarities to the lignin structure, such as common linkages or common structure seen in lignin. Zakzeski et al. categorize the most commonly researched lignin model compounds into β -O-4 linkage, carbon-carbon linkage, β -5 linkage, α -O-4 and 4-O-5 linkage, and *p*-coumaryl, coniferyl, and sinapyl alcohol [51].

4.1. Lignin Degrading Enzymes

Lignin degrading enzymes must have properties distinct from cellulose or hemicellulose degrading enzymes. Hydrolytic enzymes that can cleave other plant material cannot cleave lignin because of lignin's heterogeneous C-C and C-O linkages [52]. The enzymes responsible for the initiation of lignin polymerization in plants, low potential oxidoreductases, cannot oxidize the non-phenolic aromatic components of lignin [5]. However, some fungal and bacterial species do express enzymes that can break down the bulky and heterogeneous structures of lignin and/or convert smaller lignin-derived molecules into carbon and energy (Table 3) [53,54].

There are four major types of ligninolytic peroxidases: ligninolytic peroxidase (LiP), manganese-dependent peroxidase (MnP), versatile peroxidase (VP), and dye-decolorizing peroxidase (DyP) [5,55]. LiP, originally isolated from *Phanerochaete chrysosporium*, can oxidize molecules with high redox potential, including the moderately activated non-phenolic aromatics that can make up to 90% of the lignin polymer [5,56,57]. Unlike LiP, MnP cannot oxidize non-phenolics, and it is dependent on Mn^{2+} ions. However, MnP can oxidize phenolic model lignin compounds [5,58]. VP can oxidize both non-phenolic and phenolic compounds [5,59]. DyPs are the most recently discovered ligninolytic peroxidases. DyPs are unique because they can oxidize hydroxyl-free anthraquinone [55]. Many dyes are derived from anthraquinone, and therefore, it is present in dye-contaminated wastewater [55]. Anthraquinone is also used in the pulping process as a redox catalyst in papermaking [2]. White-rot fungi produce aryl-alcohol oxidase and glyoxal oxidase, and these oxidases produce hydrogen peroxide for the peroxidases [60,61].

Laccases are another class of enzymes contributing to the degradation of lignin. These copper-containing oxidases are found in bacteria and fungi, reduce molecular oxygen to water, and oxidize a large range of compounds including polyphenols, methoxy-substituted phenols, and diamines [62]. However, laccases are bulky and have non-phenolic sub-units that prohibit direct action on the lignin polymer. Instead, laccases have been shown to depolymerize lignin and lignin-derived molecules by action on smaller mediator molecules such as 2,2'-azino-bis(3-ethylbenzothiazoline)-6-sulphonic acid (ABTS) and hydroxybenzotriazole (HBT) [54,63,64].

Table 3. Major enzyme families involved in lignin degradation.

Enzyme	Function
Ligninolytic peroxidase (LiP)	Oxidizes molecules with high redox potential, including moderately activated non-phenolic aromatics (up to 90% of lignin polymer) [5,56,57]
Manganese-dependent peroxidase (MnP)	Oxidizes phenolic compounds [5,58]
Versatile peroxidase (VP)	Oxidizes both non-phenolic and phenolic compounds [5,59]
Dye-decolorizing peroxidase (DyP)	Oxidizes hydroxyl-free anthraquinone and peroxidase substrates [55]
Lacasse	Oxidize aromatics and phenols, take action on smaller molecules in lignin such as ABTS and HBT in order to oxidize non-phenolic aromatics [54,62–64]

4.2. Bacterial and Fungal Pathways of Lignin Utilization

The bacteria Alpha-proteobacteria, gamma-proteobacteria, Firmicutes, and some actinomycetes have been shown to modify or degrade lignin. However, a bioinformatic analysis has shown a higher proportion of lignin-degrading genes in proteobacteria and actinobacteria than in Firmicutes [54,65]. The metabolic pathways for aromatic degradation depend on the microorganism and its environment, particularly its oxygen availability (Figure 3).

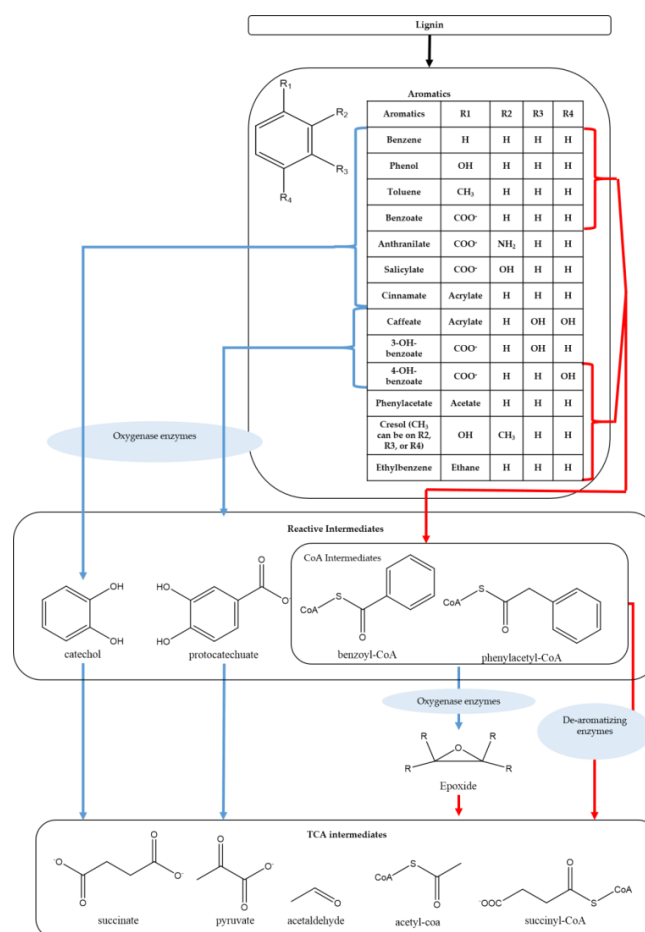


Figure 3. Aromatics can be degraded via aerobic routes (indicated by blue lines) or anaerobic routes (indicated by red lines). In the two far left routes, aromatics are converted to reactive intermediates and then converted to elements of the TCA cycle. In the third route, aromatics are first converted to reactive intermediates, then reactive intermediates are converted into non-aromatic epoxides. Next, the non-aromatic epoxides are converted to TCA cycle intermediates. In the far right route, aromatics are converted into reactive intermediates, then reduced, and finally converted into elements of the TCA cycle. This figure is an adaptation from Figure 2 in Fuchs et al. [9].

4.2.1. Aerobic Degradation

In aerobic degradation, aromatic compounds derived from lignin are normally attacked by oxygenases with the help of O₂ [9,66]. The aromatic compounds are funneled to a few key molecules known as central intermediates, which can then be more easily converted into elements of the tricarboxylic acid (TCA) cycle. Hydroxylated central intermediates such as catechol (1,2-dihydroxybenzene), protocatechuate (3,4-dihydroxybenzoate), and less frequently gentisate or homogentisate, are normally produced from aromatic monomers with the help of bacterial and fungal oxygenases [67–72]. The hydroxylated products are activated for oxidative ring cleavage because they have electron rich functional groups in ortho and para positions. The central intermediates are then converted by ring-cleaving enzymes [73–78].

The β -ketoadipate pathway is a classic example of oxygenation and ring-cleavage. Dioxygen aromatic cleavage can proceed in the ortho position between the two hydroxy groups or in the meta position adjacent to the two hydroxyl groups [9].

Another route to cleaving the aromatic ring, which may be an adaptation of low or fluctuating O₂ environments, is epoxidation of CoA thioesters. In this route, O₂ is used to form a non-aromatic epoxide. Then the ring is cleaved by hydrolysis and the molecule is converted to TCA cycle intermediates. The epoxidation route occurs in bacteria to degrade benzoate, phenylacetate, or compounds that can be broken into these two molecules. The epoxidation route requires monooxygenases in the class I di-iron protein pathway. In the case of benzoate and phenylacetate degradation, the monooxygenases act as epoxidases to catalyze ring epoxidation. The epoxidation of CoA thioesters to degrade benzoate and phenylacetate occur either as the only pathway or as an additional pathway in low oxygen conditions in about 5% and 16%, respectively, of all bacteria that have a sequenced genome [79–89].

4.2.2. Anaerobic Conditions

In anoxic conditions, O₂ can no longer be used as a co-substrate, and the aromatic ring must be reduced, which is a demanding reaction. Reduction of the aromatic ring requires agents with redox potentials that are much more negative than a physiological electron donor could provide. Therefore, the anaerobic pathways use central intermediates with substituents that have an electron withdrawing effect [9].

A common intermediate in the anaerobic breakdown of aromatic compounds is benzoyl-CoA, where the electron-withdrawing substituent is the carboxyl-thioester group. The benzoyl-CoA type molecules can then be reduced by ring-reducing enzymes [9,72,90,91].

Another group of intermediates in the anaerobic breakdown of aromatic compounds is those with two or more hydroxy groups in the meta position relative to each other. When the hydroxy groups are in the meta position relative to each other, they polarize the ring, which facilitates the reduction of the aromatic compound [9,92]. There have been two main anaerobic routes discovered that degrade aromatics. In the first anaerobic route, aromatic ring cleavage can occur via benzoyl-CoA reduction, driven by ATP hydrolysis and catalyzed by class I benzoyl-CoA reductases [9,93]. It is proposed that the ATP-independent class II benzoyl-CoA reductase recently discovered in *Geobacter metallireducens* and other similar systems could be used as an anaerobic ATP-independent route to aromatic degradation [9,94].

4.3. Application Directed Studies of Lignin Degrading Microorganisms

Specialized microorganisms that contain the enzymes and reaction pathways described above could be harnessed with the following applications in mind: microbial utilization of aromatic-containing waste streams and microbial production of industrially relevant fuels and chemicals from lignin-derived aromatic monomers. There is also an ongoing search for novel enzymes, pathways, and microorganisms, often isolated from unique environments that are suited for use in these applications.

Our knowledge of fungal lignin-degrading enzymes far exceeds our knowledge of bacterial lignin-degrading enzymes. However, fungal systems are typically difficult to manipulate and slow acting. There is a push for utilization of bacterial systems, which are simpler and faster. Tropical soils are depleted of oxygen, limiting fungal growth as well as the oxygen-dependent activities of traditional peroxidases. The unique tropical soil environment was hypothesized to harbor anaerobic lignin degrading bacteria. *Enterobacter lignolyticus* SCF1 was isolated by anaerobically culturing tropical forest soils on minimal media with lignin as the sole carbon source [95]. *E. lignolyticus* SCF1 degraded 56% (wt/vol) of the lignin in a lignin/xylose growth medium within 48 h. The *E. lignolyticus* SCF1 enzymes up-regulated in the presence of lignin included: catalase/peroxidase, DyP-type peroxidase, and two glutathione S-transferases (GSTs) [96,97]. As mentioned earlier, peroxidases are a key component of lignin degradation. However, it is still unclear exactly how peroxidases are involved in anaerobic lignin degradation. The presence of GSTs is evidence of a possible β -aryl ether cleavage mechanism in lignin degradation [97].

Several bacteria with aromatic degradation capability have been isolated from termite guts and woodboring beetles [54]. There is some debate on the extent that the microorganisms degrade lignin in vivo compared to the extent that microorganisms degrade lignin in vitro. One metagenomics study of hindgut microflora did not find any lignin degradation genes [98]. However, microflora from the same termite were able to degrade lignin in vitro [99]. In another study on the microflora from *Anoplophora glabripennis* and *Zootermopsis angusticollis*, lignin was depolymerized, demethylated, and ring-hydroxylated. The aerobic reactions required for lignin depolymerization observed in *A. glabripennis* and *Z. angusticollis* indicate that some of the lignin degradation occurs in the foregut rather than in the hindgut, which is mostly anaerobic [99,100].

In order to identify novel lignin degrading microorganisms, a fluorescent transcriptional reporter system was used as a biosensor [101]. This biosensor can respond to specific lignin degradation products such as vanillin, vanillic acid, and p-coumaric acid and was used to screen a DNA library prepared from metagenomes of coal beds. DNA fragments that were enriched were isolated, and the corresponding lignin transformation genes were identified. Recurring subsets of gene functions included: oxidoreductase activity, co-substrate generation (hydrogen peroxide generation), protein secretion, small molecule transport (multidrug efflux superfamily), motility (methyl-accepting chemotaxis proteins), and signal transduction [101]. Oxidoreductase activity, hydrogen peroxide generation, and protein secretion are associated with lignin degradation [54,102]. It was concluded that the small molecule transport systems had a role in regulating microbial responses when exposed to aromatic monomers. The cell motility was proposed to have a role in facilitating optimal positioning, which may be important in environments with microscale physicochemical gradients [101,103]. Signal transduction proteins could play a role in mediating lignin specificity in a microbial community [101].

A study of the structure and biochemistry of *Streptomyces* enzymes gave insight into unique laccase binding capability. SACTE_2871 is found in a *Streptomyces* species isolated from the Pinewood-boring wasp. SACTE_2871 can catalyze O₂-dependent ring opening of catechols. Catechols are often intermediates in the breakdown of lignin-derived molecules. SACTE_2871 can also directly bind to synthetic lignin polymers [5,104]. Similarly, small laccases found in *Streptomyces* species have been found to be able to bind directly to non-phenolic model lignin compounds and rearrange non-phenolic compounds with the help of mediators. The small laccases can also oxidize phenolic β -O-4 linkages [5,105].

Studying the utilization of lignin-derived compounds in nature can be important in tracking the global carbon cycle and monitoring the degradation of pollutants. For instance, the lignin biphenyl component can account for up to 10% of the lignin structure. The biological fate of the lignin biphenyl component is therefore linked with the degradation of lignin. Bacterial biphenyl degradation is well documented in a number of genera and has been reviewed elsewhere [54]. The pollutants benzene, toluene, ethylbenzene, and xylenes (BTEX), naphthalene, and 2-methylnaphthalene are all

aromatic in nature, have structural similarities to lignin-derived molecules, and can be degraded anaerobically [9,106].

The conversion or upgrading of lignin to a higher value molecule could contribute to a more cost-effective biomass processing scheme as discussed further in the economics section. Model lignin-derived compounds can converge via the downstream production of vanillin and vanillic acid before being converted to protocatechuic acid [7]. Extensive research on vanillin production via microorganisms, partially motivated by the global demands for vanillin (12,000 tons/year), has been reviewed elsewhere [107,108].

5. Challenges and Progress in Depolymerization of Isolated Lignin

Even when lignin is isolated, it often needs to be depolymerized into smaller molecules before it can be upgraded. There are five major methods of depolymerization (Table 4): pyrolysis of isolated lignin, catalytic hydrogenolysis, supercritical depolymerization, solvent depolymerization, and alkaline hydrolysis.

Table 4. Non-biological depolymerization methods for isolated lignin.

Recovery Methods	Benefits	Challenges	Products
Pyrolysis of isolated lignin [109–113]	Simple process	Selectivity for specific aromatic compounds is very low; char formation	Aromatic and non-aromatic molecules, char, and light gasses
Catalytic pyrolysis [114–118]	Products are less oxygenated and more stable	Coke deposits on catalysts	Aromatic hydrocarbon containing liquid, char, coke, light hydrocarbons, and oxygenate gasses
Supercritical water [119–123]	Lower concentration of lignin means lower chance of condensation reactions	High cost for process heat; only one-third of lignin product is low molecular weight	Aromatic hydrocarbon containing liquid, char
Supercritical solvent [124–130]	Products have a lower boiling point allowing for easier separation	Mid-high pressure High temperature	Primary product is monomeric substituted cyclohexyl derivatives, negligible aromatics, little to no char
Base-catalyzed depolymerization [12,131]	Oil contains low molecular weight species	Produces around 20% (wt/wt) desired oil product compared to the total weight of the products (oil, residual lignin, and coke)	Coke (undesired), oil (desired)

5.1. Pyrolysis of Isolated Lignin

Pyrolysis is a simple and fast process to depolymerize lignin. The bio-oils obtained from pyrolysis of isolated lignin are complex mixtures of hundreds of phenolic monomers and oligomers, with no specific compound making up more than 1% of the total product weight. It is known that the products of lignin pyrolysis differ by biomass type. Pyrolysis of hardwood lignin produces both syringol and guaiacol-type phenols, whereas pyrolysis of softwood lignin produces mostly guaiacol-type phenols. Pyrolysis of herbaceous lignin produces a mixture of syringol, guaiacol and phenol types of compounds [132,133]. An investigation of the thermal decomposition of lignin derived from both herbaceous (rice straw and rice husk) and woody (maple) biomass used TG-FTIR and pyrolysis-gas chromatography/mass spectrometry (Py-GC/MS). There were three mass loss stages observed: the evaporation of water, the evolution of aromatic compounds, and the release of light gasses. It was found that more phenolic compounds, methanol, and methane evolved from maple lignin. Maple lignin was also the most thermally unstable because it formed phenolic compounds earlier than the herbaceous lignin. However, the formation of carbon dioxide was higher in herbaceous lignin than in maple lignin. Py-GC/MS analysis revealed that evolution of phenol-type and aromatic compounds increased with increased temperature due to more demethoxylation and dihydroxylation reactions [133]. Quantifiable phenolic monomers account for up to 17 wt% of the pyrolysis oil, [134]

depending on the lignin feedstock. The majority of the compounds in the lignin-derived bio-oil are phenolic oligomers. It has been shown that during pyrolysis of lignin derived from corn stover by organosolv treatment, phenolic monomers and dimers are mainly produced. However, the reactive monomers can rapidly repolymerize [135]. Isolated lignin contains an increased amount of C-C bonds, which is more resistant to thermal depolymerization. Coupled with free radical initiated repolymerization during pyrolysis, isolated lignin could produce over 40% char [136,137]. Approaches to reduce char formation could significantly enhance lignin volatilization.

5.2. Catalytic Pyrolysis of Isolated Lignin

The addition of a catalyst to the pyrolysis reactor can improve product selectivity [118]. For instance, the use of a solid acid catalyst, such as HZSM-5 zeolite, can convert the wide range of phenolic compounds to a smaller number of aromatic hydrocarbons, such as benzene, toluene, and xylene (BTX). Other types of catalysts, such as HY zeolite [138], Al-MCM-41, (CoO/MoO₃) and Co/Mo/Al₂O₃ [109,110] have also been tested for lignin pyrolysis. However, these catalysts are less efficient in deoxygenating lignin compared to HZSM-5. Challenges with catalytic pyrolysis of lignin include coke deposits on the catalyst [2,109–113] and low product yield.

In catalytic hydropyrolysis, external hydrogen can help to stabilize reactive free radicals formed during lignin depolymerization and promote hydrodeoxygenation. Hydrocracking also lowers char and coke yields [139]. Under high partial pressure H₂ and in the presence of Ru/C catalyst, Alcell organosolv lignin was converted into cycloalkanes, alky-substituted cyclohexanols, cyclohexanol and linear alkanes [140]. A wide range of supported catalysts, Ru (C, Al₂O₃, and TiO₂), Pd (C, and Al₂O₃), and a Cu/ZrO₂, were also screened for catalytic hydrotreatment of Alcell lignin. It was found that Ru/TiO₂ outperforms other catalysts, yielding a mixture of alkylphenols, aromatics, and catechols [141]. The complex oil mixture formed during catalytic hydropyrolysis is analogous to the bio-oil formed during pyrolysis. However, there is a lower oxygen content in catalytic hydropyrolysis oil, which makes it more stable than pyrolysis bio-oil [114,115]. Incorporating transitional metals into HZSM-5 was beneficial because the bifunctional catalyst has both deoxygenation and hydrogenation abilities. Pyrolysis of steam-explosion hybrid-poplar lignin using 1 wt% Pd/HZSM-5 at 1.7 MPa of H₂ produced 44% more aromatic hydrocarbons compared to HZSM-5 as the catalyst. Due to high partial pressure of hydrogen, saturation of the benzene ring occurred and cycloalkanes were found among the products [142].

5.3. Supercritical Water

In the supercritical and subcritical treatment of lignin, there is a lower concentration of lignin compared to catalytic hydropyrolysis of dry lignin, and therefore the probability of undesirable condensation reactions is lower. However, the process heat required for the production of supercritical water is high and the economic viability depends on process heat recovery. Alkali salts have been shown to improve oil production, however, the maximum theoretical yield of low molecular weight products is only one-third of the total lignin weight. The addition of phenol, butanol, and boric acid has been shown to help the depolymerization of lignin and to increase the selectivity of the desired oil product [119–123]. In the case of phenol, butanol, and boric acid addition, products will be biphenyl dimer structures, which can be used as a high boiling solvent. Alternatively, the dimers can be cracked into two aromatic monomers and be partially recycled into the process [2].

5.4. Supercritical Solvents

Supercritical solvents such as ethanol [124–127], methanol [128,129], CO₂/acetone/water [130], and butanol [122] have been used to dissolve isolated lignins at temperatures between 200 and 350 °C and high pressures. Mixtures of alcohols and water have also been utilized at milder pressures [127,143,144]. Lignin solvolysis can be categorized into either base-catalyzed depolymerization or hydrogenolysis. The hydrogen used for hydrogenolysis can come from a variety of

sources, such as external hydrogen supply, a proton donor such as tetralin [144] and formic acid added to the solvent [145,146], or partial reforming of the solvent in the presence of a metal catalyst [129]. When hydrogen donating solvents are used for depolymerization, the presence of a hydrogenation catalyst stabilizes lignin depolymerization products and therefore increases the yield of phenolic monomers. Conversion of birch wood lignin in alcohols (methanol, ethanol and ethylene glycol) using Ni-based catalyst resulted in a phenolic oil with the selectivity of propylguaiacol and propylsyringol higher than 90% [147]. Cyclic hydrocarbons (primarily monomeric substituted cyclohexyl derivatives) can be formed from supercritical solvolysis. The lower boiling point of the cyclic hydrocarbons allows for separation and purification at lower temperatures, and the lower temperatures help to prevent repolymerization reactions known to happen at higher temperatures [2].

5.5. Base-Catalyzed Depolymerization

Lignins can be used to produce low molecular weight compounds when subjected to high temperature and pressure in the presence of a base in aqueous or organic solution. This process is known as base-catalyzed depolymerization [131]. A study of the base-catalyzed depolymerization of three different organosolv lignins (acetosolv, acetosolv/formosolv, and formosolv) showed that a higher yield of desired oil product was achieved from base-catalyzed depolymerization of acetosolv and acetosolv/formosolv lignins. Undesired coke production was low in the acetosolv lignin but higher when formosolv was included or used by itself, indicating that formic acid decreased the effectiveness of the catalyst. However, the formosolv oil contained higher amounts of phenolic monomers because the formosolv lignin had the lowest molecular weight. Base-catalyzed depolymerization produces only about 20% (*wt/wt*) oil when compared to the total product that contains repolymerized lignin fragments formed from condensation fragments and a coke by-product [12]. In order to improve the yield of phenolic monomers, boric acid and phenol capping agents were compared in base-catalyzed depolymerization of pruned olive tree branches. When phenol was used as a capping agent, the yields of the phenolic monomers were higher than with no capping agent or with a boric acid capping agent. Boric acid did prevent repolymerization, but the char production was higher compared to the phenolic capping [12].

6. Upgrading of Lignin Monomers

Depolymerized lignin monomers can be further upgraded into industrially relevant chemicals by biological or chemical processing. The chemical processing can be similar to lignin isolation and lignin depolymerization, and sometimes there are not clear distinctions between isolation, depolymerization, and upgrading (as discussed in Section 6.2).

6.1. Progress in Biological Utilization of Depolymerized Lignin Monomers and Lignin Model Compounds

There are two main approaches in the application of microbes to the upgrading of lignin. One approach is a biotransformation in which only a few catalytic steps are utilized from one target reactant to one target product. The other approach is to funnel a number of target reactants through the central metabolism of the microbe and tune the target product based off of industrial relevance. Chemicals produced from lignin-derived substrates or pure compounds known to be present in lignin are listed in Table 5.

Table 5. Biological lignin upgrading.

Molecule Class	Demonstrated Products
Phenolics	Vanillin [107]
Dicarboxylic acids	Muconic acid [148], Succinic acid [53]
Fatty acids	Fatty acid methyl esters (15–18) [149]
Polyhydroxyalkanoates (PHAs)	Short—medium chain length [149,150]
Alpha-hydroxy acids	Lactic acid [53]

6.1.1. Biotransformation

Vanillin can be produced by a number of specialized microorganisms from aromatic molecules such as eugenol [151–157], isoeugenol [157–168], ferulic acid [154,162,169–186], vanillic acid [172,174], and green coconut husk [187]. However, the low titers of vanillin and degradation of vanillin by the microorganisms are problematic [107].

6.1.2. Central Metabolism

Instead of looking at the capability of a microorganism to transform one lignin monomer into one product, microorganisms can be harnessed to utilize multiple substrates, addressing the challenge of the heterogeneous nature of lignin. This funneling strategy was demonstrated by microbial utilization of alkaline pretreated liquor (APL), which contained 35% lignin derived molecules. Both low molecular weight lignins (200–400 Da) and high molecular weight lignins (as high as 30,000 Da) were present [53,148–150]. Fourteen taxonomically diverse microorganisms were tested for their ability to depolymerize lignin, uptake biomass-derived molecules such as aromatic monomers, produce extracellular oxidative enzymes, and accumulate carbon storage products from the lignin derived molecules when grown in APL. *Amycolatopsis* sp., *P. putida* KT2440, *P. putida* mt-2, and *Acinetobacter* sp. were the top lignin converters, demonstrating 15%–20% lignin conversion in nitrogen limiting conditions, and 22%–31% lignin conversion in nutrient rich conditions. These species were also able to utilize a wide molecular weight range of lignin. *R. jostii* could not depolymerize the high molecular weight lignin, but *R. jostii* did convert a high percentage of lignin overall by demonstrating 20% lignin conversion in nitrogen limiting conditions, and 26% lignin conversion in nutrient rich conditions.

It follows that the top lignin converting species consumed the major aromatic monomers in the APL and also produced laccase and peroxidase enzymes. The three *Pseudomonads* and *Cupriavidus necator* H16 produced high amounts of laccases, 3–6 mU/mL, in nutrient rich conditions. *P. putida* KT2440 produced the most laccase enzymes at day five of the seven-day incubation in nutrient-rich conditions, a total of 6 mU/mL. Although *C. necator* H16 was not a top lignin converter, it produced the most Mn^{2+} independent peroxidases at 6 mU/mL by day two of the seven-day incubation. *Pseudomonas fluorescens* Pf-5, *Rhodococcus erythropolis* U23A, and *P. putida* KT2440 all produced over 3 mU/mL of Mn^{2+} peroxidases. The three *Pseudomonads*, *C. necator* H16, and *Enterobacter lignolyticus* SCF1 all produced over 2 mU/mL of Mn^{2+} oxidizing enzymes in nitrogen limiting conditions. In nutrient-rich conditions, the three *Pseudomonads*, *C. necator* H16 all produced over 7 mU/mL of Mn^{2+} oxidizing enzymes with *Pseudomonas putida* KT2440 producing 11 mU/mL.

Four of the five top lignin converters stored carbon as fatty acids or polyhydroxyalkanoates (PHAs) under nitrogen-limiting conditions. *Acinetobacter* sp. was the only top lignin converter that did not store carbon [149]. *P. putida* KT2440 stored 0.25 g/L medium chain length PHAs from APL. As a proof-of-concept, the medium chain length PHAs were subjected to thermal depolymerization and catalytic dehydrogenation to produce hydrocarbons [150].

Other target compounds can be produced by native lignin-utilizing microbes that have been subjected to additional metabolic engineering. For example, *P. putida* KT2440 was engineered to utilize both the protocatechuate and the catechol branches of the β -ketoadipate pathway to produce muconic acid. The engineered *P. putida* KT2440 produced muconic acid from a variety of model aromatic molecules including catechol, phenol, benzoate, protocatechuate, coniferyl alcohol, ferulate, vanillin, caffeate, *p*-coumarate, and 4-hydroxybenzoate. In fed-batch culture, the engineered *P. putida* KT2440 produced muconic acid at a titer of 13.5 g/L from *p*-coumarate in 78.5 h. This muconic acid was purified and converted to adipic acid with a Pd/C catalyst. However, when APL was used as a substrate in shake flasks, only 0.7 g/L muconic acid was produced. While this production represented 67% yield of the two major aromatics detected in the APL (*p*-coumarate and ferulic acid), the titer is much lower than that observed from pure substrates [148]. This is consistent with the use of biomass-derived sugars relative to pure substrate [36]. In this case, the APL contained both aromatic and non-aromatic compounds, and *P. putida* KT2440 did not convert all aromatics at the same efficiency.

Making changes to the catechol and protocatechuate pathways might improve production of target products, such as muconic acid, or change the target products altogether. The position where catechol or protocatechuate are cleaved affects the amount of succinate, acetyl-CoA, and pyruvate produced. For example, when the endogenous catechol ortho pathway in *P. putida* KT2440 was exchanged with the exogenous catechol meta pathway, the pyruvate yield increased from 23.9 ± 3.1 to 31.0 ± 0.9 percent. When the endogenous protocatechuate ortho pathway was replaced by the exogenous protocatechuate ortho pathway, the pyruvate yield increased almost five-fold [53].

6.2. Progress in Chemical Utilization

Lignin can undergo many chemical modifications including, but not limited to, alkylation, acylation, amination, carboxylation, halogenation, oxidation, reduction, nitration, and sulfonation [188].

Figure 4 shows the major thermochemical depolymerization processes in conjunction with the produced products [188]. Zakzeski describes three categories of catalytic lignin transformations: lignin catalytic cracking and hydrolysis, lignin reduction, and lignin oxidation. These processes have been employed with lignin substrates, lignin model compounds, and depolymerized lignin [51].

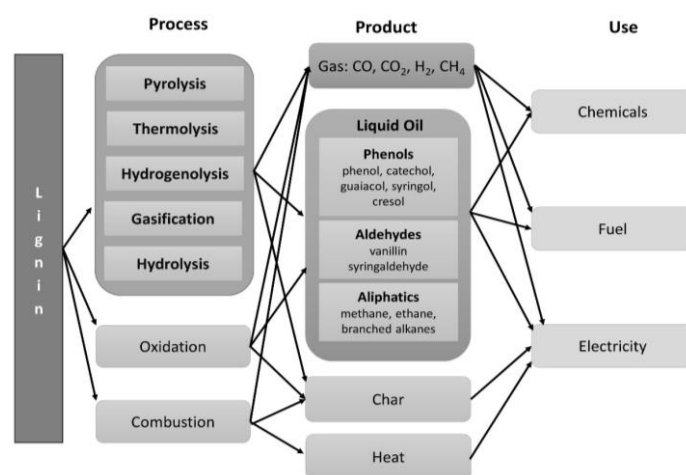


Figure 4. Major thermochemical lignin processes used to depolymerize lignin and the resulting products, as shown by Macfarlane et al. [188].

Liquefaction processes produce monophenolic compounds that can be converted to liquid fuels by hydrodeoxygenation [189]. Monomeric, aromatic-based compounds have also been obtained by steam treatment followed by base-depolymerization to generate two fractions: a monomeric fraction and a dimeric and trimeric fraction [190]. The yield of the monomeric fraction was as great as 15 wt% of the initial lignin and included phenolic species such as vanillin, guaiacol, phenol, and catechol. Monomers provide an opportunity for green aromatic-based compounds [190].

Pyrolysis is viewed as one of the most promising thermochemical technologies for lignin utilization [191,192]. The main compounds produced from lignin during fast pyrolysis are gaseous hydrocarbons (i.e., CO₂, CO), volatile liquids (methanol, acetone and acetaldehyde), monolignols, monophenols (phenol, guaiacol, syringol, and catechol) and other monosubstituted phenols [188].

Lignin is the key biorenewable source of aromatic compounds with phenolics, for example, vanillic acid, syringic acid, ferulic acid, syringol, guaiacol, and eugenol attracting the interest of polymer chemists [51,193–196]. They are also valuable building blocks for synthesis of bisphenols [194,197–199], aliphatic-aromatic polyesters [194,199–201], polyethylene terephthalate mimics [194,202], and epoxy resins [194,203–205]. Additionally, there is strong interest in the continued development of polyurethane precursors originating from renewable resources [194].

6.2.1. Cracking and Hydrolysis of Depolymerized Lignin

In lignin catalytic cracking, the β -O-4 linkage is cleaved, and the carbon-carbon bonds are relatively unstable [206]. The zeolite H-ZSM-5 has been used for catalytic cracking of pyrolytic lignin [109,207–210], pyrolytic oil [211], and model compounds obtained from flash pyrolyzed vegetable biomass [212]. Products obtained from catalytic cracking with H-ZSM-5 can include aromatic hydrocarbons, aliphatic hydrocarbons, alcohols, and undesired coke product [51]. Other catalysts such as Pt/Al₂-SiO₂ [213], supported or non-supported Pt-modified superacid catalysts, and metal-loaded large pore zeolites have also been successful in catalytic cracking of biomass derived substrates [109]. In the non-zeolite catalytic cracking, products can include aromatics and phenolic compounds [51].

6.2.2. Reduction of Lignin Model Compounds and Depolymerized Lignin

After the lignin is depolymerized using methods described previously in Section 5, the depolymerized lignin (oil) can be upgraded using similar catalysts. Initial hydrogenolysis or hydrocracking studies of phenol, *o*-cresol, anisole, catechol, syringol, and guaiacol revealed that removal of oxygen for the purpose of increased stability could be done under milder conditions than required for thermal fragmentation and deoxygenation [214–216]. Hydrodeoxygenation of guaiacol has yielded phenol or catechol, although phenol is the preferred product at higher temperatures [214,216]. Depending on the catalyst and temperature, anisole can yield phenol, *o*-cresol, and 2,6-dimethylphenol [214,216]. Further hydrodeoxygenation of the phenol (produced from guaiacol or anisole) can yield benzene and cyclohexane [216]. Excellent conversion of guaiacol and 77% selectivity of phenol was achieved at 598 K, 5 MPa H₂, with a Co-Mo/Al₂O₃ catalyst [216]. Catechol has been shown to be more reactive than phenol itself when subject to hydrodeoxygenation with a Ni-Mo/Al₂O₃ catalyst at 623 K [217]. A mixture of bio-oil model compounds has also been subject to hydrodeoxygenation with Co-Mo and Ni-Mo catalysts, and the catechol component of the bio-oil was converted to phenol [218].

Key conclusions were drawn from studies of hydrodeoxygenation of the lignin-derived phenolic model compounds. Higher temperatures caused rapid deactivation of the catalyst, which was attributed to large amounts of water release, coke formation, and loss of sulfur. However, below 523 K, the catalyst stayed active for 50 h [214]. In addition, the alumina supports for catalysts have shown activity. In fact, when neutral supports such as carbon replaced the alumina, lower activity was observed. However, polycondensation products and coke formation are thought to be associated with the alumina support [218]. When an activated carbon supported Co-Mo catalyst was used instead, there was negligible coke production [219]. The range of lignin-derived model compounds was increased by the hydrotreatment of 4-methylguaiacol, 4-methylcatechol, eugenol, vanillin, *o,o'*-biphenol, *o*-hydroxydiphenylmethane, and phenyl ether using a Co-Mo/Al₂O₃ catalyst (523–598 K, 6.9 MPa). Substituted guaiacols and catechols could react to form thermally stable phenols at 573 K [220].

In exploring different iron and molybdenum catalysts on lignin-derived model compounds, it was found that the molybdenum catalysts significantly increased the aromatic bond cleavage, and the iron catalysts only slightly increased the aromatic bond cleavage. Therefore, molybdenum catalysts are better candidates for the production of monophenol and benzene in the hydrocracking process [221]. In order to study the effects of a promoter for the supported molybdenum catalyst, lignin-derived phenolic compounds were subject to hydrodeoxygenation over a Co-Mo/Al₂O₃ catalyst. It was found that 4-propylguaiacol was converted to phenol at temperatures lower than 573 K, but at temperatures greater than 673 K, saturated and aromatic hydrocarbons were produced instead. A Ni-Mo catalyst with a more acidic support was shown to have higher dealkylation activity, which resulted in higher yields of cresols and phenol [222].

As mentioned before, the traditional hydrodeoxygenation catalysts discussed above encounter problems with deactivation by coke formation and poisoning by water [51]. With the common problems of traditional catalysts in mind, different metals and supports were tested for hydrodeoxygenation

of anisole. Zirconia and ceria supports were found to be the most effective, and in a comparison of a Ni-Cu/ZrO₂ and Ni-Cu/CeO₂, the former produced mostly aromatics from anisole, and the latter almost fully converted anisole to cyclohexane. In addition, rhodium catalysts performed well for the production of aromatics in some cases [223]. In the interest of using supported platinum-group catalysts, which are known to be more active than sulfided molybdenum catalysts and can be used at lower temperatures, Ru/C and Pd/C were tested for catalytic hydroprocessing of guaiacol. Substrate hydrogenation and loss of aromaticity were observed using both catalysts [224]. Similarly, Pd/C, Pt/C, or Ru/C combined with mineral acids were used to completely hydrogenate and deoxygenate phenols, guaiacols, and syringols to produce cycloalkanes and methanol [225]. Hydrotreatment of pyrolytic lignin with a Ru/C catalyst produced cycloalkanes, alkyl substituted cyclohexanols, cyclohexanol, and linear alkenes [140]. The catalyst types discussed above such as Ru/C are therefore too active for maintaining the aromaticity of the lignin model compounds or depolymerized lignin [51].

In order to try to maintain the aromaticity, guaiacol or catechol was subject to reductive deoxygenation in the presence of α -terpinene and a vanadium or alumina catalyst at atmospheric pressure. Phenol and methyl-substituted phenols were produced at high yield and selectivity [226].

Electrocatalysis has been researched as a possible route for efficient lignin degradation by hydrogenation [51]. Electrocatalysis of the model lignin compound 4-phenoxyphenol with Raney Ni and Pd supported on alumina and carbon showed high efficiencies of electrohydrogenolysis to phenol [227].

A few studies have been done with homogeneous catalysis of lignin-derived phenolic compounds. A di- μ -chlorobis (η^4 -1,5-hexadiene)-dirhodium(I) complex catalyzed the lignin-derived model compounds 4-propylphenol, eugenol, 1,2-dimethoxy-4-propylbenzene, and 2,6-dimethoxy-4-propylphenol. The temperature was 298 K and the medium was two-phase hexane/aqueous [228].

6.2.3. Oxidation of Lignin Model Compounds and Depolymerized Lignin

In the oxidation of lignin model compounds, the goal is to create more complex aromatic molecules, which could be industrially relevant. Although oxidation of lignin historically comes from the pulping industry, this review will focus on upgrading of monomers by oxidation. The Ng/MiO catalysts have been shown to oxidize phenolic, nonphenolic, monomeric, and dimeric lignin model compounds. Vanillyl and veratryl alcohol were oxidized to acids, aldehydes, and quinones (49% yield) and polymeric products [229,230]. In another oxidation study of lignin model compounds, methylrhenium trioxide was used to catalyze the oxidation of isoeugenol or *trans*-ferulic acid in the presence of hydrogen peroxide to produce vanillin [231]. Wet oxidation of ferulic acid was carried out by single metal, bimetal, multimetal, and multimetal oxide alumina or kaolin supported catalysts. Cu-Mn/Al₂O₃ was the most stable catalyst studied and it was the second most active catalyst [232]. An electrocatalysis study carried out the anodic oxidation of lignin model compounds in methanol, and it was shown that the C $_{\alpha}$ -C $_{\beta}$ bond was cleaved [233].

In the study of homogeneous catalysts for oxidation, the idea of biomimicry has been used [51]. Originally iron and manganese porphyrin catalysts were used to better understand the enzymatic degradation of lignin, and it was shown that the iron porphyrin catalysts cleave the C $_{\alpha}$ -C $_{\beta}$ and oxidize lignin model compounds [234].

Metalloporphyrin catalysts are well studied in the selective oxidation of hydrocarbons and therefore are of interest for selective oxidation of lignin and lignin model compounds and have been reviewed by Crestini and Tagliatesta [51,235]. High conversion (67%) was achieved in the oxidation of veratryl alcohol with free and ion-exchange resin-immobilized Fe(TPPS) and Mn(TPPS) complexes using KHSO₅ as an oxidant [236]. Several other metalloporphyrin or metalloporphyrin-like catalysts have been used to oxidize lignin model compounds including iron(III) and manganese(III) meso-tetraphenylporphyrin and phthalocyanine complexes [237], iron porphyrin catalysts [238], and trisodium tetra-4-sulfonatophthalocyanineiron(III) [239]. The incorporation of a variety of ring

substituents, the incorporation of axial ligands, and the immobilization of the metalloporphyrin can improve stability, tenability, and recyclability of the catalyst [51].

Simple metal salt-based catalysts have been used for oxidation of lignin and lignin model compounds. Co(II) acetate and Mn(II) acetate were used as catalysts in the single-electron oxidation of a lignin model compound, and it was found that the oxidation occurred primarily by cleavage of the $C_{\alpha}-C_{\beta}$ bond [240].

A well-known example of adding value to lignin monomers involves the oxidative production of vanillin from spent sulfite liquor. A 227,000 kg/year facility was built for this purpose in Thorold, Ontario in 1945 and by 1981 was producing 3.4×10^6 kg/year, accounting for more than half of the world vanillin market [241]. However, the disposal of the waste generated by this process eventually led to this process falling out of favor, with the Thorold plant closing in 1987.

7. Economic Analysis of Lignin Utilization Strategies

The adage that “you can make anything from lignin except money” is well-known in the biofuels and pulp and paper industries. The technological advances reviewed here regarding lignin recovery, depolymerization and upgrading are chipping away at this long-held belief. This establishment of lignin as a source of value appears to be critical to the economic viability of the biorefinery concept. An economic analysis of the utilization of lignocellulosic biomass relies on a number of factors including cost of the biomass feedstock, capital costs, operating costs, and the market size and selling price of the target product(s). The utilization of a lignin “waste” stream in an existing lignocellulosic biomass processing facility could provide an additional source of income for the facility. However, a detailed analysis is needed to determine if the additional income from selling lignin or a lignin-based product would exceed the required capital and operating costs for producing the purified lignin and/or lignin-based product, as highlighted by the example of vanillin production. Since existing lignocellulosic biomass processing facilities often utilize lignin for process heat and electricity, it would also be important to determine what fraction of the available lignin should be diverted to upgrading. The advantage of choosing a platform chemical as a target product is that it provides flexibility. Instead of targeting one product and one application, a platform chemical that can be converted into a variety of downstream products would help with marketability.

Multiple reports have concluded that selling lignin as a co-product contributes to the economic viability of biofuels. A comprehensive 2013 report by the US National Renewable Energy Laboratory (NREL) concluded that achievement of the target value of 3.00 US dollars per gallon of gasoline equivalent fuel required lignin valorization [242]. Kautto et al. modeled the organsolv-based production of ethanol from hardwood with lignin, furfural, and acetic acid as co-products [243]. Consistent with the NREL conclusion, the value of the lignin product was a strong determinant of the minimum ethanol selling price. Specifically, a value of 1.00 US dollars per kg of lignin was required for the ethanol to be sold at market price. Analysis of the production of ethanol from corn stover using ionic liquids for biomass deconstruction concluded that if 65% of the lignin was recovered and sold, a lignin selling price of 2.62 US dollars per kg was sufficient to meet the market price for ethanol [244]. Finally, at least one technoeconomic analysis has included a specific upgrading method for the lignin. Chen and Fu modeled the production of ethanol from corn stover with lignin plastic composite and compressed natural gas as co-products, where the natural gas is produced from the spent fermentation media [245]. This analysis predicted that inclusion of these two co-product streams resulted in a 19% decrease in the ethanol production cost.

Studies have also compared how different lignin utilization strategies impact the process economics, though these have mainly compared the use of lignin to produce steam and electricity to the use of lignin as a soil amendment. Petrou et al. [246] compared corn stover-based ethanol processes in which lignin is burned to produce electricity and steam to processes in which lignin is modified to produce lignosulfonates and/or geomaterial. This study concluded that burning the lignin to produce steam and excess electricity was the top economic performer, but that the scenario

in which lignin was used as a geomaterial was the best in terms of environmental performance [246]. Pourhashem et al. [247] analyzed the production of ethanol from agricultural residues, such as corn stover and barley straw, with the use of lignin as a soil amender, as a coal substitute to produce electricity or for the on-site production of electricity. The use of lignin as a soil amender was deemed the best in terms of both greenhouse gas intensity and capital cost.

As the technologies associated with lignin recovery and upgrading develop, future economic analyses can incorporate these processes and provide additional insight into which routes are the most promising for industrial use.

Acknowledgments: Funding for this work was provided in part by CenUSA (USDA AFRI 2011-68005-30411) and Iowa State University's Bioeconomy Institute.

Conflicts of Interest: The authors declare no conflict of interest.

Abbreviations

The following abbreviations are used in this manuscript:

TCA	tricarboxylic acid cycle
TG-FTIR	thermogravimetric-fourier transform infrared spectroscopy
Py-GC/MS	pyrolysis-gas chromatography/mass spectrometry
PHA	polyhydroxyalkanoates

References

1. Brown, R.C.; Brown, T.R. *Biorenewable Resources: Engineering New Products from Agriculture*; John Wiley & Sons: New York, NY, USA, 2013.
2. Azadi, P.; Inderwildi, O.R.; Farnood, R.; King, D.A. Liquid fuels, hydrogen and chemicals from lignin: A critical review. *Renew. Sustain. Energy Rev.* **2013**, *21*, 506–523. [CrossRef]
3. Bugg, T.D.H.; Rahmanpour, R. Enzymatic conversion of lignin into renewable chemicals. *Curr. Opin. Chem. Biol.* **2015**, *29*, 10–17. [CrossRef] [PubMed]
4. Stewart, D. Lignin as a base material for materials applications: Chemistry, application and economics. *Ind. Crops Prod.* **2008**, *27*, 202–207. [CrossRef]
5. Fisher, A.B.; Fong, S.S. Lignin biodegradation and industrial implications. *AIMS Bioeng.* **2014**, *1*, 92–112.
6. Lora, J.H.; Glasser, W.G. Recent industrial applications of lignin: A sustainable alternative to nonrenewable materials. *J. Polym. Environ.* **2002**, *10*, 39–48. [CrossRef]
7. Hamelinck, C.N.; van Hooijdonk, G.; Faaij, A.P.C. Ethanol from lignocellulosic biomass: Techno-economic performance in short-, middle- and long-term. *Biomass Bioenergy* **2005**, *28*, 384–410. [CrossRef]
8. Ragauskas, A.J.; Beckham, G.T.; Biddy, M.J.; Chandra, R.; Chen, F.; Davis, M.F.; Davison, B.H.; Dixon, R.A.; Gilna, P.; Keller, M.; et al. Lignin valorization: Improving lignin processing in the biorefinery. *Science* **2014**, *344*, 1246843. [CrossRef] [PubMed]
9. Fuchs, G.; Boll, M.; Heider, J. Microbial degradation of aromatic compounds—From one strategy to four. *Nat. Rev. Microbiol.* **2011**, *9*, 803–816. [CrossRef] [PubMed]
10. Boerjan, W.; Ralph, J.; Baucher, M. Lignin biosynthesis. *Annu. Rev. Plant Biol.* **2003**, *54*, 519–546. [CrossRef] [PubMed]
11. Tuck, C.O.; Perez, E.; Horvath, I.T.; Sheldon, R.A.; Poliakov, M. Valorization of biomass: Deriving more value from waste. *Science* **2012**, *337*, 695–699. [CrossRef] [PubMed]
12. Toledano, A.; Serrano, L.; Labidi, J. Improving base catalyzed lignin depolymerization by avoiding lignin repolymerization. *Fuel* **2014**, *116*, 617–624. [CrossRef]
13. Wong, D.W.S. Structure and action mechanism of ligninolytic enzymes. *Appl. Biochem. Biotechnol.* **2009**, *157*, 174–209. [CrossRef] [PubMed]
14. Huang, F.; Ragauskas, A. Extraction of hemicellulose from loblolly pine woodchips and subsequent kraft pulping. *Ind. Eng. Chem. Res.* **2013**, *52*, 1743–1749. [CrossRef]
15. Sannigrahi, P.; Ragauskas, A.J.; Tuskan, G.A. Poplar as a feedstock for biofuels: A review of compositional characteristics. *Biofuels Bioprod. Biorefin.* **2010**, *4*, 209–226. [CrossRef]

16. Nunes, C.A.; Lima, C.F.; Barbosa, L.C.D.A.; Colodette, J.L.; Fidêncio, P.H. Determination of chemical constituents in eucalyptus wood by Py-GC/MS and multivariate calibration: Comparison between artificial neural network and support vector machines. *Quím. Nova* **2011**, *34*, 279–283. [[CrossRef](#)]
17. Brosse, N.; Dufour, A.; Meng, X.Z.; Sun, Q.N.; Ragauskas, A. Miscanthus: A fast-growing crop for biofuels and chemicals production. *Biofuels Bioprod. Biorefin.* **2012**, *6*, 580–598. [[CrossRef](#)]
18. David, K.; Ragauskas, A.J. Switchgrass as an energy crop for biofuel production: A review of its ligno-cellulosic chemical properties. *Energy Environ. Sci.* **2010**, *3*, 1182–1190. [[CrossRef](#)]
19. Saha, B.C.; Yoshida, T.; Cotta, M.A.; Sonomoto, K. Hydrothermal pretreatment and enzymatic saccharification of corn stover for efficient ethanol production. *Ind. Crops Prod.* **2013**, *44*, 367–372. [[CrossRef](#)]
20. Sun, X.F.; Wang, H.H.; Zhang, G.C.; Fowler, P.; Rajaratnam, M. Extraction and characterization of lignins from maize stem and sugarcane bagasse. *J. Appl. Polym. Sci.* **2011**, *120*, 3587–3595. [[CrossRef](#)]
21. Pat, R.; Kordsachi, O.; Süttinger, R. Pulp. In *Ullmann's Encyclopedia of Industrial Chemistry*; Wiley-VCH Verlag GmbH & Co. KGaA: Weinheim, Germany, 2011.
22. Demirbaş, A. Pyrolysis and steam gasification processes of black liquor. *Energy Convers. Manag.* **2002**, *43*, 877–884. [[CrossRef](#)]
23. Mims, A.; Kocurek, M.; Pyatte, J.; Wright, E. *Kraft Pulping Chemistry and Process*; Tappi Press: Peach Tree Corners, GA, USA, 1989.
24. El Mansouri, N.-E.; Salvadó, J. Structural characterization of technical lignins for the production of adhesives: Application to lignosulfonate, kraft, soda-anthraquinone, organosolv and ethanol process lignins. *Ind. Crops Prod.* **2006**, *24*, 8–16. [[CrossRef](#)]
25. Sarkanen, K.V. Chemistry of solvent pulping. *Tappi J.* **1990**, *73*, 215–219.
26. Holladay, J.E.; White, J.F.; Bozell, J.J.; Johnson, D. *Top Value-Added Chemicals from Biomass—Volume II—Results of Screening for Potential Candidates from Biorefinery Lignin*; Pacific Northwest National Laboratory (PNNL): Richland, WA, USA, 2007.
27. Hayes, D.J.; Fitzpatrick, S.; Hayes, M.H.B.; Ross, J.R.H. The biofine process—Production of levulinic acid, furfural, and formic acid from lignocellulosic feedstocks. In *Biorefineries—Industrial Processes and Products: Status Quo and Future Directions*; Kamm, B., Gruber, P.R., Kamm, M., Eds.; Wiley-VCH Verlag GmbH: Weinheim, Germany, 2006; Volume 1, pp. 139–164.
28. Azadi, P.; Carrasquillo-Flores, R.; Pagán-Torres, Y.J.; Gürbüz, E.I.; Farnood, R.; Dumesic, J.A. Catalytic conversion of biomass using solvents derived from lignin. *Green Chem.* **2012**, *14*, 1573–1576. [[CrossRef](#)]
29. Yan, N.; Zhao, C.; Dyson, P.J.; Wang, C.; Liu, L.T.; Kou, Y. Selective degradation of wood lignin over noble-metal catalysts in a two-step process. *ChemSusChem* **2008**, *1*, 626–629. [[CrossRef](#)] [[PubMed](#)]
30. Vanharanta, H.; Kauppila, J. Engineering aspects and feasibility of a wood pulping process using Batelle-Geneva's aqueous phenol process by Rintekno. In *Proceedings of the World Pulp and Paper Week*, Stockholm, Sweden, 10–13 April 1984.
31. Scholze, B.; Meier, D. Characterization of the water-insoluble fraction from pyrolysis oil (pyrolytic lignin). Part I. Py-GC/MS, FTIR, and functional groups. *J. Anal. Appl. Pyrolysis* **2001**, *60*, 41–54. [[CrossRef](#)]
32. Gayubo, A.G.; Valle, B.; Aguayo, A.T.; Olazar, M.; Bilbao, J. Pyrolytic lignin removal for the valorization of biomass pyrolysis crude bio-oil by catalytic transformation. *J. Chem. Technol. Biotechnol.* **2010**, *85*, 132–144. [[CrossRef](#)]
33. Jiang, X.X.; Ellis, N.; Zhong, Z.P. Characterization of pyrolytic lignin extracted from bio-oil. *Chin. J. Chem. Eng.* **2010**, *18*, 1018–1022. [[CrossRef](#)]
34. Deng, L.; Yan, Z.; Fu, Y.; Guo, Q.X. Green solvent for flash pyrolysis oil separation. *Energy Fuels* **2009**, *23*, 3337–3338. [[CrossRef](#)]
35. Blackwell, P.; Riethmuller, G.; Collins, M. Biochar application to soil. In *Biochar for Environmental Management: Science and Technology*; Earthscan: London, UK, 2009.
36. Jarboe, L.R.W.; Choi, Z.; Brown, D.; Robert, C. Hybrid thermochemical processing: Fermentation of pyrolysis-derived bio-oil. *Appl. Microbiol. Biotechnol.* **2011**, *91*, 1519–1523. [[CrossRef](#)] [[PubMed](#)]
37. Funaoka, M.; Abe, I. Rapid separation of wood into carbohydrate and lignin with concentrated acid-phenol system. *Tappi J.* **1989**, *72*, 145–149.
38. Vega, A.; Bao, M. Fractionation of lignocellulose materials with phenol and dilute hcl. *Wood Sci. Technol.* **1991**, *25*, 459–466. [[CrossRef](#)]

39. Vega, A.; Bao, M.; Lamas, J. Application of factorial design to the modelling of organosolv delignification of *Miscanthus sinensis* (elephant grass) with phenol and dilute acid solutions. *Bioresour. Technol.* **1997**, *61*, 1–7. [[CrossRef](#)]
40. Sakakibara, A.; Edashige, Y.; Sano, Y.; Takeyama, H. Solvolysis pulping with cresols-water system. *Holzforschung* **1984**, *38*, 159–165. [[CrossRef](#)]
41. Skakibara, A.; Edashige, Y.; Sano, Y.; Takeyama, H. Solvolysis pulping with lignin degradation products. In Proceedings of the International Symposium on Wood and Pulping Chemistry, Tsukuba Science City, Japan, 23–27 May 1983.
42. Willauer, H.D.; Huddleston, J.G.; Li, M.; Rogers, R.D. Investigation of aqueous biphasic systems for the separation of lignins from cellulose in the paper pulping process. *J. Chromatogr. B* **2000**, *743*, 127–135. [[CrossRef](#)]
43. Guo, Z.; Li, M.; Willauer, H.D.; Huddleston, J.G.; April, G.C.; Rogers, R.D. Evaluation of polymer-based aqueous biphasic systems as improvement for the hardwood alkaline pulping process. *Ind. Eng. Chem. Res.* **2002**, *41*, 2535–2542. [[CrossRef](#)]
44. Guo, Z.; April, G.C.; Li, M.; Willauer, H.D.; Huddleston, J.G.; Rogers, R.D. Peg-based aqueous biphasic systems as improvement for kraft hardwood pulping process. *Chem. Eng. Commun.* **2003**, *190*, 1155–1169. [[CrossRef](#)]
45. Chen, J.; Spear, S.K.; Huddleston, J.G.; Rogers, R.D. Polyethylene glycol and solutions of polyethylene glycol as green reaction media. *Green Chem.* **2005**, *7*, 64–82.
46. Vom Stein, T.; Grande, P.M.; Kayser, H.; Sibilla, F.; Leitner, W.; de Maria, P.D. From biomass to feedstock: One-step fractionation of lignocellulose components by the selective organic acid-catalyzed depolymerization of hemicellulose in a biphasic system. *Green Chem.* **2011**, *13*, 1772–1777. [[CrossRef](#)]
47. Lee, R.A.; Berberi, V.; Labranche, J.; Lavoie, J.M. Lignin extraction—Reassessment of the severity factor with respect to hydroxide concentration. *Bioresour. Technol.* **2014**, *169*, 707–712. [[CrossRef](#)] [[PubMed](#)]
48. Overend, R.P.; Chornet, E. Fractionation of lignocellulosics by steam-aqueous pretreatments. *Philos. Trans. R. Soc. A Math. Phys. Eng. Sci.* **1987**, *321*, 523–536. [[CrossRef](#)]
49. Chum, H.L.; Johnson, D.K.; Black, S.K.; Overend, R.P. Pretreatment catalyst effects and the combined severity parameter. *Appl. Biochem. Biotechnol.* **1990**, *24–25*, 1–14. [[CrossRef](#)]
50. Silverstein, R.A.; Chen, Y.; Sharma-Shivappa, R.R.; Boyette, M.D.; Osborne, J. A comparison of chemical pretreatment methods for improving saccharification of cotton stalks. *Bioresour. Technol.* **2007**, *98*, 3000–3011. [[CrossRef](#)] [[PubMed](#)]
51. Zakzeski, J.; Bruijninx, P.C.A.; Jongerius, A.L.; Weckhuysen, B.M. The catalytic valorization of lignin for the production of renewable chemicals. *Chem. Rev.* **2010**, *110*, 3552–3599. [[CrossRef](#)] [[PubMed](#)]
52. Abdel-Hamid, A.M.; Solbiati, J.O.; Cann, I.K.O. Insights into lignin degradation and its potential industrial applications. In *Advances in Applied Microbiology*; Sariaslani, S., Gadd, G.M., Eds.; Elsevier Academic Press Inc.: San Diego, CA, USA, 2013; Volume 82, pp. 1–28.
53. Johnson, C.W.; Beckham, G.T. Aromatic catabolic pathway selection for optimal production of pyruvate and lactate from lignin. *Metab. Eng.* **2015**, *28*, 240–247. [[CrossRef](#)] [[PubMed](#)]
54. Bugg, T.D.H.; Ahmad, M.; Hardiman, E.M.; Singh, R. The emerging role for bacteria in lignin degradation and bio-product formation. *Curr. Opin. Biotechnol.* **2011**, *22*, 394–400. [[CrossRef](#)] [[PubMed](#)]
55. Sugano, Y.; Muramatsu, R.; Ichiyanagi, A.; Sato, T.; Shoda, M. Dyp, a unique dye-decolorizing peroxidase, represents a novel heme peroxidase family. *J. Biol. Chem.* **2007**, *282*, 36652–36658. [[CrossRef](#)] [[PubMed](#)]
56. Tien, M.; Kirk, T.K. Lignin-degrading enzyme from *Phanerochaete chrysosporium* purification, characterization, and catalytic properties of a unique H₂O₂-requiring oxygenase. *Proc. Natl. Acad. Sci. USA* **1984**, *81*, 2280–2284. [[CrossRef](#)] [[PubMed](#)]
57. Miki, K.; Renganathan, V.; Gold, M.H. Mechanism of beta-aryl ether dimeric lignin model-compound oxidation by lignin peroxidase of *Phanerochaete chrysosporium*. *Biochemistry* **1986**, *25*, 4790–4796. [[CrossRef](#)]
58. Paszczynski, A.; Huynh, V.B.; Crawford, R. Enzymatic-activities of an extracellular, manganese-dependent peroxidase from *Phanerochaete chrysosporium*. *FEMS Microbiol. Lett.* **1985**, *29*, 37–41. [[CrossRef](#)]

59. Perez-Boada, M.; Ruiz-Duenas, F.J.; Pogni, R.; Basosi, R.; Choinowski, T.; Martinez, M.J.; Piontek, K.; Martinez, A.T. Versatile peroxidase oxidation of high redox potential aromatic compounds: Site-directed mutagenesis, spectroscopic and crystallographic investigation of three long-range electron transfer pathways. *J. Mol. Biol.* **2005**, *354*, 385–402. [[CrossRef](#)] [[PubMed](#)]
60. Kersten, P.J.; Kirk, T.K. Involvement of a new enzyme, glyoxal oxidase, in extracellular H₂O₂ production by *Phanerochaete chrysosporium*. *J. Bacteriol.* **1987**, *169*, 2195–2201. [[PubMed](#)]
61. Guillen, F.; Martinez, M.J.; Munoz, C.; Martinez, A.T. Quinone redox cycling in the ligninolytic fungus *Pleurotus eryngii* leading to extracellular production of superoxide anion radical. *Arch. Biochem. Biophys.* **1997**, *339*, 190–199. [[CrossRef](#)] [[PubMed](#)]
62. Thurston, C.F. The structure and function of fungal laccases. *Microbiology* **1994**, *140*, 19–26. [[CrossRef](#)]
63. Have, R.; Teunissen, P.J.M. Oxidative mechanisms involved in lignin degradation by white-rot fungi. *Chem. Rev.* **2001**, *101*, 3397–3413. [[CrossRef](#)] [[PubMed](#)]
64. Rich, J.O.; Anderson, A.M.; Berhow, M.A. Laccase-mediator catalyzed conversion of model lignin compounds. *Biocatal. Agric. Biotechnol.* **2016**, *5*, 111–115. [[CrossRef](#)]
65. Zimmermann, W. Degradation of lignin by bacteria. *J. Biotechnol.* **1990**, *13*, 119–130. [[CrossRef](#)]
66. Hayaishi, O. From oxygenase to sleep. *J. Biol. Chem.* **2008**, *283*, 19165–19175. [[CrossRef](#)] [[PubMed](#)]
67. Dagley, S.; Evans, W.C.; Ribbons, D.W. New pathways in the oxidative metabolism of aromatic compounds by micro-organisms. *Nature* **1960**, *188*, 560–566. [[CrossRef](#)] [[PubMed](#)]
68. Dagley, S. Degradation of benzene nucleus by bacteria. *Sci. Prog.* **1965**, *53*, 381–392. [[CrossRef](#)]
69. Dagley, S. Catabolism of aromatic compounds by microorganisms. *Adv. Microb. Physiol.* **1971**, *6*, 1–46. [[PubMed](#)]
70. Ornston, L.N.; Stanier, R.Y. Conversion of catechol and protocatechuate to beta-ketoadipate by *Pseudomonas putida*. *J. Biol. Chem.* **1966**, *241*, 3776–3786. [[PubMed](#)]
71. Stanier, R.Y.; Ornston, L.N. The beta-ketoadipate pathway. *Adv. Microb. Physiol.* **1973**, *9*, 89–151. [[PubMed](#)]
72. Harwood, C.S.; Burchhardt, G.; Herrmann, H.; Fuchs, G. Anaerobic metabolism of aromatic compounds via the benzoyl-CoA pathway. *FEMS Microbiol. Rev.* **1998**, *22*, 439–458. [[CrossRef](#)]
73. Harayama, S.; Kok, M.; Neidle, E.L. Functional and evolutionary relationships among diverse oxygenases. *Ann. Rev. Microbiol.* **1992**, *46*, 565–601. [[CrossRef](#)] [[PubMed](#)]
74. Butler, C.S.; Mason, J.R. Structure-function analysis of the bacterial aromatic ring-hydroxylating dioxygenases. *Adv. Microb. Physiol.* **1997**, *38*, 47–84. [[PubMed](#)]
75. Gibson, D.T.; Parales, R.E. Aromatic hydrocarbon dioxygenases in environmental biotechnology. *Curr. Opin. Biotechnol.* **2000**, *11*, 236–243. [[CrossRef](#)]
76. Leahy, J.G.; Batchelor, P.J.; Morcomb, S.M. Evolution of the soluble diiron monooxygenases. *FEMS Microbiol. Rev.* **2003**, *27*, 449–479. [[CrossRef](#)]
77. Vaillancourt, F.H.; Bolin, J.T.; Eltis, L.D. The ins and outs of ring-cleaving dioxygenases. *Crit. Rev. Biochem. Mol. Biol.* **2006**, *41*, 241–267. [[CrossRef](#)] [[PubMed](#)]
78. Lipscomb, J.D. Mechanism of extradiol aromatic ring-cleaving dioxygenases. *Curr. Opin. Struct. Biol.* **2008**, *18*, 644–649. [[CrossRef](#)] [[PubMed](#)]
79. Rather, L.J.; Knapp, B.; Haehnel, W.; Fuchs, G. Coenzyme A-dependent aerobic metabolism of benzoate via epoxide formation. *J. Biol. Chem.* **2010**, *285*, 20615–20624. [[CrossRef](#)] [[PubMed](#)]
80. Rather, L.J.; Bill, E.; Ismail, W.; Fuchs, G. The reducing component BoxA of benzoyl-coenzyme A epoxidase from *Azoarcus evansii* is a 4Fe–4S protein. *Biochim. Biophys. Acta Proteins Proteom.* **2011**, *1814*, 1609–1615. [[CrossRef](#)] [[PubMed](#)]
81. Rather, L.J.; Weinert, T.; Demmer, U.; Bill, E.; Ismail, W.; Fuchs, G.; Ermler, U. Structure and mechanism of the diiron benzoyl-coenzyme A epoxidase BoxB. *J. Biol. Chem.* **2011**, *286*, 29241–29248. [[CrossRef](#)] [[PubMed](#)]
82. Mohamed, M.E.-S.; Zaar, A.; Ebenau-Jehle, C.; Fuchs, G. Reinvestigation of a new type of aerobic benzoate metabolism in the proteobacterium *Azoarcus evansii*. *J. Bacteriol.* **2001**, *183*, 1899–1908. [[CrossRef](#)] [[PubMed](#)]
83. Zaar, A.; Eisenreich, W.; Bacher, A.; Fuchs, G. A novel pathway of aerobic benzoate catabolism in the bacteria *Azoarcus evansii* and *Bacillus stearothermophilus*. *J. Biol. Chem.* **2001**, *276*, 24997–25004. [[CrossRef](#)] [[PubMed](#)]
84. Zaar, A.; Gescher, J.; Eisenreich, W.; Bacher, A.; Fuchs, G. New enzymes involved in aerobic benzoate metabolism in *Azoarcus evansii*. *Mol. Microbiol.* **2004**, *54*, 223–238. [[CrossRef](#)] [[PubMed](#)]
85. Gescher, J.; Zaar, A.; Mohamed, M.; Schagger, H.; Fuchs, G. Genes coding for a new pathway of aerobic benzoate metabolism in *Azoarcus evansii*. *J. Bacteriol.* **2002**, *184*, 6301–6315. [[CrossRef](#)] [[PubMed](#)]

86. Gescher, J.; Eisenreich, W.; Worth, J.; Bacher, A.; Fuchs, G. Aerobic benzoyl-CoA catabolic pathway in *Azoarcus evansii*: Studies on the non-oxygenolytic ring cleavage enzyme. *Mol. Microbiol.* **2005**, *56*, 1586–1600. [[CrossRef](#)] [[PubMed](#)]
87. Gescher, J.; Ismail, W.; Olgeschlager, E.; Eisenreich, W.; Worth, J.; Fuchs, G. Aerobic benzoyl-Coenzyme A (CoA) catabolic pathway in *Azoarcus evansii*: Conversion of ring cleavage product by 3,4-dehydroadipyl-coa semialdehyde dehydrogenase. *J. Bacteriol.* **2006**, *188*, 2919–2927. [[CrossRef](#)] [[PubMed](#)]
88. Ismail, W. Benzoyl-coenzyme A thioesterase of *Azoarcus evansii*: Properties and function. *Arch. Microbiol.* **2008**, *190*, 451–460. [[CrossRef](#)] [[PubMed](#)]
89. Bains, J.; Leon, R.; Boulanger, M.J. Structural and biophysical characterization of BoxC from *Burkholderia xenovorans* LB400 a novel ring-cleaving enzyme in the crotonase superfamily. *J. Biol. Chem.* **2009**, *284*, 16377–16385. [[CrossRef](#)] [[PubMed](#)]
90. Heider, J.; Fuchs, G. Microbial anaerobic aromatic metabolism. *Anaerobe* **1997**, *3*, 1–22. [[CrossRef](#)] [[PubMed](#)]
91. Heider, J.; Fuchs, G. Anaerobic metabolism of aromatic compounds. *Eur. J. Biochem.* **1997**, *243*, 577–596. [[CrossRef](#)] [[PubMed](#)]
92. Schink, B.; Philipp, B.; Muller, J. Anaerobic degradation of phenolic compounds. *Naturwissenschaften* **2000**, *87*, 12–23. [[CrossRef](#)] [[PubMed](#)]
93. Boll, M.; Fuchs, G. Benzoyl-coenzyme A reductase (dearomatizing), a key enzyme of anaerobic aromatic metabolism—ATP dependence of the reaction, purification and some properties of the enzyme from *Thauera aromatica* strain K172. *Eur. J. Biochem.* **1995**, *234*, 921–933. [[CrossRef](#)] [[PubMed](#)]
94. Kung, J.W.; Löffler, C.; Dorner, K.; Heintz, D.; Gallien, S.; van Dorsselaer, A.; Friedrich, T.; Boll, M. Identification and characterization of the tungsten-containing class of benzoyl-coenzyme A reductases. *Proc. Natl. Acad. Sci. USA* **2009**, *106*, 17687–17692. [[CrossRef](#)] [[PubMed](#)]
95. DeAngelis, K.M.; Fortney, J.L.; Borglin, S.; Silver, W.L.; Simmons, B.A.; Hazen, T.C. Anaerobic decomposition of switchgrass by tropical soil-derived feedstock-adapted consortia. *mBio* **2012**, *3*, 9. [[CrossRef](#)] [[PubMed](#)]
96. DeAngelis, K.M.; D’Haeseleer, P.; Chivian, D.; Fortney, J.L.; Khudyakov, J.; Simmons, B.; Woo, H.; Arkin, A.P.; Davenport, K.W.; Goodwin, L.; et al. Complete genome sequence of *Enterobacter lignolyticus* SCF1. *Stand. Genom. Sci.* **2011**, *5*, 69–85. [[CrossRef](#)] [[PubMed](#)]
97. DeAngelis, K.M.; Sharma, D.; Varney, R.; Simmons, B.; Isern, N.G.; Markillie, L.M.; Nicora, C.; Norbeck, A.D.; Taylor, R.C.; Aldrich, J.T.; et al. Evidence supporting dissimilatory and assimilatory lignin degradation in *Enterobacter lignolyticus* SCF1. *Front. Microbiol.* **2013**, *4*, 280. [[CrossRef](#)] [[PubMed](#)]
98. Warnecke, F.; Luginbuhl, P.; Ivanova, N.; Ghassemian, M.; Richardson, T.H.; Stege, J.T.; Cayouette, M.; McHardy, A.C.; Djordjevic, G.; Aboushadi, N.; et al. Metagenomic and functional analysis of hindgut microbiota of a wood-feeding higher termite. *Nature* **2007**, *450*, 560–565. [[CrossRef](#)] [[PubMed](#)]
99. Kato, K.; Kozaki, S.; Sakuranaga, M. Degradation of lignin compounds by bacteria from termite guts. *Biotechnol. Lett.* **1998**, *20*, 459–462. [[CrossRef](#)]
100. Geib, S.M.; Filley, T.R.; Hatcher, P.G.; Hoover, K.; Carlson, J.E.; Jimenez-Gasco, M.D.; Nakagawa-Izumi, A.; Sleighter, R.L.; Tien, M. Lignin degradation in wood-feeding insects. *Proc. Natl. Acad. Sci. USA* **2008**, *105*, 12932–12937. [[CrossRef](#)] [[PubMed](#)]
101. Strachan, C.R.; Singh, R.; VanInsberghe, D.; Ievdokymenko, K.; Budwill, K.; Mohn, W.W.; Eltis, L.D.; Hallam, S.J. Metagenomic scaffolds enable combinatorial lignin transformation. *Proc. Natl. Acad. Sci. USA* **2014**, *111*, 10143–10148. [[CrossRef](#)] [[PubMed](#)]
102. Ruiz-Duenas, F.J.; Martinez, A.T. Microbial degradation of lignin: How a bulky recalcitrant polymer is efficiently recycled in nature and how we can take advantage of this. *Microb. Biotechnol.* **2009**, *2*, 164–177. [[CrossRef](#)] [[PubMed](#)]
103. He, S.M.; Ivanova, N.; Kirton, E.; Allgaier, M.; Bergin, C.; Scheffrahn, R.H.; Kyrpides, N.C.; Warnecke, F.; Tringe, S.G.; Hugenholtz, P. Comparative metagenomic and metatranscriptomic analysis of hindgut paunch microbiota in wood- and dung-feeding higher termites. *PLoS ONE* **2013**, *8*. [[CrossRef](#)] [[PubMed](#)]
104. Bianchetti, C.M.; Harmann, C.H.; Takasuka, T.E.; Hura, G.L.; Dyer, K.; Fox, B.G. Fusion of dioxygenase and lignin-binding domains in a novel secreted enzyme from cellulolytic *Streptomyces* sp. SirexAA-E. *J. Biol. Chem.* **2013**, *288*, 18574–18587. [[CrossRef](#)] [[PubMed](#)]
105. Majumdar, S.; Lukk, T.; Solbiati, J.O.; Bauer, S.; Nair, S.K.; Cronan, J.E.; Gerlt, J.A. Roles of small laccases from *Streptomyces* in lignin degradation. *Biochemistry* **2014**, *53*, 4047–4058. [[CrossRef](#)] [[PubMed](#)]

106. Heider, J. Adding handles to unhandy substrates: Anaerobic hydrocarbon activation mechanisms. *Curr. Opin. Chem. Biol.* **2007**, *11*, 188–194. [[CrossRef](#)] [[PubMed](#)]
107. Kaur, B.; Chakraborty, D. Biotechnological and molecular approaches for vanillin production: A review. *Appl. Biochem. Biotechnol.* **2013**, *169*, 1353–1372. [[CrossRef](#)] [[PubMed](#)]
108. Walton, N.J.; Mayer, M.J.; Narbad, A. Molecules of interest—Vanillin. *Phytochemistry* **2003**, *63*, 505–515. [[CrossRef](#)]
109. Jackson, M.A.; Compton, D.L.; Boateng, A.A. Screening heterogeneous catalysts for the pyrolysis of lignin. *J. Anal. Appl. Pyrolysis* **2009**, *85*, 226–230. [[CrossRef](#)]
110. Mullen, C.A.; Boateng, A.A. Catalytic Pyrolysis-GC/MS of lignin from several sources. *Fuel Process. Technol.* **2010**, *91*, 1446–1458. [[CrossRef](#)]
111. Ma, Z.Q.; Troussard, E.; van Bokhoven, J.A. Controlling the selectivity to chemicals from lignin via catalytic fast pyrolysis. *Appl. Catal. A Gen.* **2012**, *423*, 130–136. [[CrossRef](#)]
112. Choi, H.S.; Meier, D.; Windt, M. Rapid screening of catalytic pyrolysis reactions of organosolv lignins with the vti-mini fast pyrolyzer. *Environ. Prog. Sustain. Energy* **2012**, *31*, 240–244. [[CrossRef](#)]
113. Sharma, R.K.; Wooten, J.B.; Baliga, V.L.; Lin, X.H.; Chan, W.G.; Hajaligol, M.R. Characterization of chars from pyrolysis of lignin. *Fuel* **2004**, *83*, 1469–1482. [[CrossRef](#)]
114. Meier, D.; Ante, R.; Faix, O. Catalytic hydrolysis of lignin: Influence of reaction conditions on the formation and composition of liquid products. *Bioresour. Technol.* **1992**, *40*, 171–177. [[CrossRef](#)]
115. Meier, D.; Berns, J.; Grünwald, C.; Faix, O. Analytical pyrolysis and semicontinuous catalytic hydrolysis of organocell lignin. *J. Anal. Appl. Pyrolysis* **1993**, *25*, 335–347. [[CrossRef](#)]
116. Balagurumurthy, B.; Oza, T.S.; Bhaskar, T.; Adhikari, D.K. Renewable hydrocarbons through biomass hydrolysis process: Challenges and opportunities. *J. Mater. Cycles Waste Manag.* **2013**, *15*, 9–15. [[CrossRef](#)]
117. Linck, M.; Felix, L.; Marker, T.; Roberts, M. Integrated biomass hydrolysis and hydrotreating: A brief review. *Wiley Interdiscip. Rev. Energy Environ.* **2014**, *3*, 575–581. [[CrossRef](#)]
118. Li, C.Z.; Zhao, X.C.; Wang, A.Q.; Huber, G.W.; Zhang, T. Catalytic transformation of lignin for the production of chemicals and fuels. *Chem. Rev.* **2015**, *115*, 11559–11624. [[CrossRef](#)] [[PubMed](#)]
119. Saisu, M.; Sato, T.; Watanabe, M.; Adschiri, T.; Arai, K. Conversion of lignin with supercritical water-phenol mixtures. *Energy Fuels* **2003**, *17*, 922–928. [[CrossRef](#)]
120. Matsumura, Y.; Sasaki, M.; Okuda, K.; Takami, S.; Ohara, S.; Umetsu, M.; Adschiri, T. Supercritical water treatment of biomass for energy and material recovery. *Combust. Sci. Technol.* **2006**, *178*, 509–536. [[CrossRef](#)]
121. Okuda, K.; Man, X.; Umetsu, M.; Takami, S.; Adschiri, T. Efficient conversion of lignin into single chemical species by solvothermal reaction in water-p-cresol solvent. *J. Phys. Condens. Matter* **2004**, *16*, S1325–S1330. [[CrossRef](#)]
122. Yoshikawa, T.; Yagi, T.; Shinohara, S.; Fukunaga, T.; Nakasaka, Y.; Tago, T.; Masuda, T. Production of phenols from lignin via depolymerization and catalytic cracking. *Fuel Process. Technol.* **2013**, *108*, 69–75. [[CrossRef](#)]
123. Roberts, V.M.; Stein, V.; Reiner, T.; Lemonidou, A.; Li, X.B.; Lercher, J.A. Towards quantitative catalytic lignin depolymerization. *Chem. A Eur. J.* **2011**, *17*, 5939–5948. [[CrossRef](#)] [[PubMed](#)]
124. Miller, J.E.; Evans, L.; Littlewolf, A.; Trudell, D.E. Batch microreactor studies of lignin and lignin model compound depolymerization by bases in alcohol solvents. *Fuel* **1999**, *78*, 1363–1366. [[CrossRef](#)]
125. Tang, Z.; Zhang, Y.; Guo, Q.X. Catalytic hydrocracking of pyrolytic lignin to liquid fuel in supercritical ethanol. *Ind. Eng. Chem. Res.* **2010**, *49*, 2040–2046. [[CrossRef](#)]
126. Nagy, M.; David, K.; Britovsek, G.J.P.; Ragauskas, A.J. Catalytic hydrogenolysis of ethanol organosolv lignin. *Holzforschung* **2009**, *63*, 513–520. [[CrossRef](#)]
127. Cheng, S.N.; Wilks, C.; Yuan, Z.S.; Leitch, M.; Xu, C.B. Hydrothermal degradation of alkali lignin to bio-phenolic compounds in sub/supercritical ethanol and water-ethanol co-solvent. *Polym. Degrad. Stab.* **2012**, *97*, 839–848. [[CrossRef](#)]
128. Tsujino, J.; Kawamoto, H.; Saka, S. Reactivity of lignin in supercritical methanol studied with various lignin model compounds. *Wood Sci. Technol.* **2003**, *37*, 299–307. [[CrossRef](#)]
129. Barta, K.; Matson, T.D.; Fettig, M.L.; Scott, S.L.; Iretskii, A.V.; Ford, P.C. Catalytic disassembly of an organosolv lignin via hydrogen transfer from supercritical methanol. *Green Chem.* **2010**, *12*, 1640–1647. [[CrossRef](#)]

130. Gosselink, R.J.A.; Teunissen, W.; van Dam, J.E.G.; de Jong, E.; Gellerstedt, G.; Scott, E.L.; Sanders, J.P.M. Lignin depolymerisation in supercritical carbon dioxide/acetone/water fluid for the production of aromatic chemicals. *Bioresour. Technol.* **2012**, *106*, 173–177. [[CrossRef](#)] [[PubMed](#)]
131. Erdocia, X.; Prado, R.; Corcuera, M.A.; Labidi, J. Base catalyzed depolymerization of lignin: Influence of organosolv lignin nature. *Biomass Bioenergy* **2014**, *66*, 379–386. [[CrossRef](#)]
132. Asmadi, M.; Kawamoto, H.; Saka, S. Pyrolysis reactions of Japanese cedar and Japanese beech woods in a closed ampoule reactor. *J. Wood Sci.* **2010**, *56*, 319–330. [[CrossRef](#)]
133. Shen, D.K.; Liu, G.F.; Zhao, J.; Xue, J.T.; Guan, S.P.; Xiao, R. Thermo-chemical conversion of lignin to aromatic compounds: Effect of lignin source and reaction temperature. *J. Anal. Appl. Pyrolysis* **2015**, *112*, 56–65. [[CrossRef](#)]
134. Patwardhan, P.R.; Brown, R.C.; Shanks, B.H. Understanding the fast pyrolysis of lignin. *ChemSusChem* **2011**, *4*, 1629–1636. [[CrossRef](#)] [[PubMed](#)]
135. Bai, X.L.; Kim, K.H.; Brown, R.C.; Dalluge, E.; Hutchinson, C.; Lee, Y.J.; Dalluge, D. Formation of phenolic oligomers during fast pyrolysis of lignin. *Fuel* **2014**, *128*, 170–179. [[CrossRef](#)]
136. Ben, H.X.; Ragauskas, A.J. NMR characterization of pyrolysis oils from kraft lignin. *Energy Fuels* **2011**, *25*, 2322–2332. [[CrossRef](#)]
137. Chu, S.; Subrahmanyam, A.V.; Huber, G.W. The pyrolysis chemistry of a Beta-O-4 type oligomeric lignin model compound. *Green Chem.* **2013**, *15*, 125–136. [[CrossRef](#)]
138. Xue, Y.; Zhou, S.; Bai, X. Role of hydrogen transfer during catalytic copyrolysis of lignin and tetralin over HZSM-5 and HY zeolite catalysts. *ACS Sustain. Chem. Eng.* **2016**, *4*, 4237–4250. [[CrossRef](#)]
139. Zhang, H.Y.; Xiao, R.; Wang, D.H.; He, G.Y.; Shao, S.S.; Zhang, J.B.; Zhong, Z.P. Biomass fast pyrolysis in a fluidized bed reactor under N₂, CO₂, CO, CH₄ and H₂ atmospheres. *Bioresour. Technol.* **2011**, *102*, 4258–4264. [[CrossRef](#)] [[PubMed](#)]
140. De Wild, P.; van der Laan, R.; Kloekhorst, A.; Heeres, E. Lignin valorisation for chemicals and (transportation) fuels via (catalytic) pyrolysis and hydrodeoxygenation. *Environ. Prog. Sustain. Energy* **2009**, *28*, 461–469. [[CrossRef](#)]
141. Kloekhorst, A.; Heeres, H.J. Catalytic hydrotreatment of alcell lignin using supported Ru, Pd, and Cu catalysts. *ACS Sustain. Chem. Eng.* **2015**, *3*, 1905–1914. [[CrossRef](#)]
142. Jan, O.; Marchand, R.; Anjos, L.C.A.; Seufitelli, G.V.S.; Nikolla, E.; Resende, F.L.P. Hydropyrolysis of lignin using Pd/HZSM-5. *Energy Fuels* **2015**, *29*, 1793–1800. [[CrossRef](#)]
143. Ye, Y.Y.; Zhang, Y.; Fan, J.; Chang, J. Selective production of 4-ethylphenolics from lignin via mild hydrogenolysis. *Bioresour. Technol.* **2012**, *118*, 648–651. [[CrossRef](#)] [[PubMed](#)]
144. Kim, K.H.; Brown, R.C.; Kieffer, M.; Bai, X.L. Hydrogen-donor-assisted solvent liquefaction of lignin to short-chain alkylphenols using a micro reactor/gas chromatography system. *Energy Fuels* **2014**, *28*, 6429–6437. [[CrossRef](#)]
145. Kleinert, M.; Barth, T. Towards a lignin-cellulosic biorefinery: Direct one-step conversion of lignin to hydrogen-enriched biofuel. *Energy Fuels* **2008**, *22*, 1371–1379. [[CrossRef](#)]
146. Xu, W.Y.; Miller, S.J.; Agrawal, P.K.; Jones, C.W. Depolymerization and hydrodeoxygenation of switchgrass lignin with formic acid. *ChemSusChem* **2012**, *5*, 667–675. [[CrossRef](#)] [[PubMed](#)]
147. Song, Q.; Wang, F.; Cai, J.Y.; Wang, Y.H.; Zhang, J.J.; Yu, W.Q.; Xu, J. Lignin depolymerization (ldp) in alcohol over nickel-based catalysts via a fragmentation-hydrogenolysis process. *Energy Environ. Sci.* **2013**, *6*, 994–1007. [[CrossRef](#)]
148. Vardon, D.R.; Franden, M.A.; Johnson, C.W.; Karp, E.M.; Guarnieri, M.T.; Linger, J.G.; Salm, M.J.; Strathmann, T.J.; Beckham, G.T. Adipic acid production from lignin. *Energy Environ. Sci.* **2015**, *8*, 617–628. [[CrossRef](#)]
149. Salvachua, D.; Karp, E.M.; Nimlos, C.T.; Vardon, D.R.; Beckham, G.T. Towards lignin consolidated bioprocessing: Simultaneous lignin depolymerization and product generation by bacteria. *Green Chem.* **2015**, *17*, 4951–4967. [[CrossRef](#)]
150. Linger, J.G.; Vardon, D.R.; Guarnieri, M.T.; Karp, E.M.; Hunsinger, G.B.; Franden, M.A.; Johnson, C.W.; Chupka, G.; Strathmann, T.J.; Pienkos, P.T.; et al. Lignin valorization through integrated biological funneling and chemical catalysis. *Proc. Natl. Acad. Sci. USA* **2014**, *111*, 12013–12018. [[CrossRef](#)] [[PubMed](#)]

151. Overhage, J.; Steinbuchel, A.; Priefert, H. Highly efficient biotransformation of eugenol to ferulic acid and further conversion to vanillin in recombinant strains of *Escherichia coli*. *Appl. Environ. Microbiol.* **2003**, *69*, 6569–6576. [[CrossRef](#)] [[PubMed](#)]
152. Ryu, J.Y.; Seo, J.; Unno, T.; Ahn, J.H.; Yan, T.; Sadowsky, M.J.; Hur, H.G. Isoeugenol monooxygenase and its putative regulatory gene are located in the eugenol metabolic gene cluster in *Pseudomonas nitroreducens* Jin1. *Arch. Microbiol.* **2010**, *192*, 201–209. [[CrossRef](#)] [[PubMed](#)]
153. Plaggenborg, R.; Overhage, J.; Loos, A.; Archer, J.A.C.; Lessard, P.; Sinskey, A.J.; Steinbuchel, A.; Priefert, H. Potential of *Rhodococcus* strains for biotechnological vanillin production from ferulic acid and eugenol. *Appl. Microbiol. Biotechnol.* **2006**, *72*, 745–755. [[CrossRef](#)] [[PubMed](#)]
154. Overhage, J.; Steinbuchel, A.; Priefert, H. Harnessing eugenol as a substrate for production of aromatic compounds with recombinant strains of *Amycolatopsis* sp. hr167. *J. Biotechnol.* **2006**, *125*, 369–376. [[CrossRef](#)] [[PubMed](#)]
155. Overhage, J.; Priefert, H.; Rabenhorst, J.; Steinbuechel, A. Construction of Production Strains for Producing Substituted Phenols by Specifically Inactivating Genes of the Eugenol and Ferulic Acid Catabolism. Patent CA2348962 A1, 11 May 2000.
156. Srivastava, S.; Luqman, S.; Khan, F.; Chanotiya, C.S.; Darokar, M.P. Metabolic pathway reconstruction of eugenol to vanillin bioconversion in *Aspergillus niger*. *Bioinformation* **2010**, *4*, 320–325. [[CrossRef](#)] [[PubMed](#)]
157. Ashengroph, M.; Nahvi, I.; Zarkesh-Esfahani, H.; Momenbeik, F. Conversion of isoeugenol to vanillin by *Psychrobacter* sp. Strain CSW4. *Appl. Biochem. Biotechnol.* **2012**, *166*, 1–12. [[CrossRef](#)] [[PubMed](#)]
158. Shimoni, E.; Ravid, U.; Shoham, Y. Isolation of a *Bacillus* sp capable of transforming isoeugenol to vanillin. *J. Biotechnol.* **2000**, *78*, 1–9. [[CrossRef](#)]
159. Furukawa, H.; Morita, H.; Yoshida, T.; Nagasawa, T. Conversion of isoeugenol into vanillic acid by *Pseudomonas putida* 158 cells exhibiting high isoeugenol-degrading activity. *J. Biosci. Bioeng.* **2003**, *96*, 401–403. [[CrossRef](#)]
160. Shimoni, E.; Baasov, T.; Ravid, U.; Shoham, Y. Biotransformations of propenylbenzenes by an *Arthrobacter* sp. and its t-anethole blocked mutants. *J. Biotechnol.* **2003**, *105*, 61–70. [[CrossRef](#)]
161. Zhao, L.Q.; Sun, Z.H.; Zheng, P.; Zhu, L.L. Biotransformation of isoeugenol to vanillin by a novel strain of *Bacillus fusiformis*. *Biotechnol. Lett.* **2005**, *27*, 1505–1509. [[CrossRef](#)] [[PubMed](#)]
162. Zhang, Y.M.; Xu, P.; Han, S.; Yan, H.Q.; Ma, C.Q. Metabolism of isoeugenol via isoeugenol-diol by a newly isolated strain of *Bacillus subtilis* hs8. *Appl. Microbiol. Biotechnol.* **2006**, *73*, 771–779. [[CrossRef](#)] [[PubMed](#)]
163. Zhao, L.Q.; Sun, Z.H.; Zheng, P.; He, J.Y. Biotransformation of isoeugenol to vanillin by *Bacillus fusiformis* CGMCC1347 with the addition of resin HD-8. *Process Biochem.* **2006**, *41*, 1673–1676. [[CrossRef](#)]
164. Kasana, R.C.; Sharma, U.K.; Sharma, N.; Sinha, A.K. Isolation and identification of a novel strain of *Pseudomonas chlororaphis* capable of transforming isoeugenol to vanillin. *Curr. Microbiol.* **2007**, *54*, 457–461. [[CrossRef](#)] [[PubMed](#)]
165. Hua, D.L.; Ma, C.Q.; Lin, S.; Song, L.F.; Deng, Z.X.; Maomy, Z.R.; Zhang, Z.B.; Yu, B.; Xu, P. Biotransformation of isoeugenol to vanillin by a newly isolated *Bacillus pumilus* strain: Identification of major metabolites. *J. Biotechnol.* **2007**, *130*, 463–470. [[CrossRef](#)] [[PubMed](#)]
166. Yamada, M.; Okada, Y.; Yoshida, T.; Nagasawa, T. Biotransformation of isoeugenol to vanillin by *Pseudomonas putida* IE27 cells. *Appl. Microbiol. Biotechnol.* **2007**, *73*, 1025–1030. [[CrossRef](#)] [[PubMed](#)]
167. Unno, T.; Kim, S.J.; Kanaly, R.A.; Ahn, J.H.; Kang, S.I.; Hur, H.G. Metabolic characterization of newly isolated *Pseudomonas nitroreducens* Jin1 growing on eugenol and isoeugenol. *J. Agric. Food Chem.* **2007**, *55*, 8556–8561. [[CrossRef](#)] [[PubMed](#)]
168. Ashengroph, M.; Nahvi, I.; Zarkesh-Esfahani, H.; Momenbeik, F. *Candida galli* strain PGO6: A novel isolated yeast strain capable of transformation of isoeugenol into vanillin and vanillic acid. *Curr. Microbiol.* **2011**, *62*, 990–998. [[CrossRef](#)] [[PubMed](#)]
169. Achterholt, S.; Priefert, H.; Steinbuchel, A. Identification of *Amycolatopsis* sp strain hr167 genes, involved in the bioconversion of ferulic acid to vanillin. *Appl. Microbiol. Biotechnol.* **2000**, *54*, 799–807. [[CrossRef](#)] [[PubMed](#)]
170. Plaggenborg, R.; Overhage, J.; Steinbuchel, A.; Priefert, H. Functional analyses of genes involved in the metabolism of ferulic acid in *Pseudomonas putida* KT2440. *Appl. Microbiol. Biotechnol.* **2003**, *61*, 528–535. [[CrossRef](#)] [[PubMed](#)]

171. Yoon, S.H.; Li, C.; Lee, Y.M.; Lee, S.H.; Kim, S.H.; Choi, M.S.; Seo, W.T.; Yang, J.K.; Kim, J.Y.; Kim, S.W. Production of vanillin from ferulic acid using recombinant strains of *Escherichia coli*. *Biotechnol. Bioprocess Eng.* **2005**, *10*, 378–384. [[CrossRef](#)]
172. Cheetham, P.S.J.; Gradley, M.L.; Sime, J.T. Flavour/Aroma Materials and Their Preparation. Patent WO2000050622 A1, 31 August 2000.
173. Alvarado, I.E.; Lomascolo, A.; Navarro, D.; Delattre, M.; Asther, M.; Lesage-Meessen, L. Evidence of a new biotransformation pathway of p-coumaric acid into p-hydroxybenzaldehyde in *Pycnoporus cinnabarinus*. *Appl. Microbiol. Biotechnol.* **2001**, *57*, 725–730.
174. Lesage-Meessen, L.; Lomascolo, A.; Bonnin, E.; Thibault, J.F.; Buleon, A.; Roller, M.; Asther, M.; Record, E.; Ceccaldi, B.C. A biotechnological process involving filamentous fungi to produce natural crystalline vanillin from maize bran. *Appl. Biochem. Biotechnol.* **2002**, *102*, 141–153. [[CrossRef](#)]
175. Agrawal, R.; Seetharam, Y.N.; Kelamani, R.C.; Jyothishwaran, G. Biotransformation of ferulic acid to vanillin by locally isolated bacterial cultures. *Indian J. Biotechnol.* **2003**, *2*, 610–612.
176. Brunati, M.; Marinelli, F.; Bertolini, C.; Gandolfi, R.; Daffonchio, D.; Molinari, F. Biotransformations of cinnamic and ferulic acid with actinomycetes. *Enzym. Microb. Technol.* **2004**, *34*, 3–9. [[CrossRef](#)]
177. Torre, P.; de Faveri, D.; Perego, P.; Ruzzi, M.; Barghini, P.; Gandolfi, R.; Converti, A. Bioconversion of ferulate into vanillin by *Escherichia coli* strain JM109/pBB1 in an immobilized-cell reactor. *Ann. Microbiol.* **2004**, *54*, 517–527.
178. Martinez-Cuesta, M.D.; Payne, J.; Hanniffy, S.B.; Gasson, M.J.; Narbad, A. Functional analysis of the vanillin pathway in a vdh-negative mutant strain of *Pseudomonas fluorescens* AN103. *Enzym. Microb. Technol.* **2005**, *37*, 131–138. [[CrossRef](#)]
179. Bloem, A.; Bertrand, A.; Lonvaud-Funel, A.; de Revel, G. Vanillin production from simple phenols by wine-associated lactic acid bacteria. *Lett. Appl. Microbiol.* **2007**, *44*, 62–67. [[CrossRef](#)] [[PubMed](#)]
180. Hua, D.L.; Ma, C.Q.; Song, L.F.; Lin, S.; Zhang, Z.B.; Deng, Z.X.; Xu, P. Enhanced vanillin production from ferulic acid using adsorbent resin. *Appl. Microbiol. Biotechnol.* **2007**, *74*, 783–790. [[CrossRef](#)] [[PubMed](#)]
181. Barghini, P.; Di Gioia, D.; Fava, F.; Ruzzi, M. Vanillin production using metabolically engineered *Escherichia coli* under non-growing conditions. *Microb. Cell Factories* **2007**, *6*, 11. [[CrossRef](#)] [[PubMed](#)]
182. Lee, E.G.; Yoon, S.H.; Das, A.; Lee, S.H.; Li, C.; Kim, J.Y.; Choi, M.S.; Oh, D.K.; Kim, S.W. Directing vanillin production from ferulic acid by increased acetyl-CoA consumption in recombinant *Escherichia coli*. *Biotechnol. Bioeng.* **2009**, *102*, 200–208. [[CrossRef](#)] [[PubMed](#)]
183. Calisti, C.; Ficca, A.G.; Barghini, P.; Ruzzi, M. Regulation of ferulic catabolic genes in *Pseudomonas fluorescens* BF13: Involvement of a MarR family regulator. *Appl. Microbiol. Biotechnol.* **2008**, *80*, 475–483. [[CrossRef](#)] [[PubMed](#)]
184. Ruzzi, M.; Luziatelli, F. Genetic engineering of *Escherichia coli* to enhance biological production of vanillin from ferulic acid. *Bull. Univ. Agric. Sci. Vet. Med. Cluj-Napoca Anim. Sci. Biotechnol.* **2008**, *65*, 4–8.
185. Sarangi, P.K.; Sahoo, H.P. Enhancing the rate of ferulic acid bioconversion utilizing glucose as carbon source. *Science* **2010**, *6*, 115–117.
186. Tilay, A.; Bule, M.; Annapure, U. Production of biovanillin by one-step biotransformation using fungus *Pycnoporus cinnabarinus*. *J. Agric. Food Chem.* **2010**, *58*, 4401–4405. [[CrossRef](#)] [[PubMed](#)]
187. Barbosa, E.D.; Perrone, D.; Vendramini, A.L.D.; Leite, S.G.F. Vanillin production by *Phanerochaete chrysosporium* grown on green coconut agro-industrial husk in solid state fermentation. *Bioresources* **2008**, *3*, 1042–1050.
188. Macfarlane, A.L.; Mai, M.; Kadla, J.F. Bio-based chemicals from biorefining: Lignin conversion and utilisation. In *Advances in Biorefineries: Biomass and Waste Supply Chain Management*; Woodhead Publishing: Cambridge, UK, 2014; pp. 659–692.
189. Ouyang, X.P.; Zhu, G.D.; Huang, X.Z.; Qiu, X.Q. Microwave assisted liquefaction of wheat straw alkali lignin for the production of monophenolic compounds. *J. Energy Chem.* **2015**, *24*, 72–76. [[CrossRef](#)]
190. Lavoie, J.M.; Bare, W.; Bilodeau, M. Depolymerization of steam-treated lignin for the production of green chemicals. *Bioresour. Technol.* **2011**, *102*, 4917–4920. [[CrossRef](#)] [[PubMed](#)]
191. Bridgwater, A.V.; Meier, D.; Radlein, D. An overview of fast pyrolysis of biomass. *Org. Geochem.* **1999**, *30*, 1479–1493. [[CrossRef](#)]
192. Liu, C.; Hu, J.; Zhang, H.Y.; Xiao, R. Thermal conversion of lignin to phenols: Relevance between chemical structure and pyrolysis behaviors. *Fuel* **2016**, *182*, 864–870. [[CrossRef](#)]

193. Calvo-Flores, F.G.; Dobado, J.A. Lignin as renewable raw material. *ChemSusChem* **2010**, *3*, 1227–1235. [[CrossRef](#)] [[PubMed](#)]
194. Kuhire, S.S.; Avadhani, C.V.; Wadgaonkar, P.P. New poly(ether urethane)s based on lignin derived aromatic chemicals via a-b monomer approach: Synthesis and characterization. *Eur. Polym. J.* **2015**, *71*, 547–557. [[CrossRef](#)]
195. Laurichesse, S.; Averous, L. Chemical modification of lignins: Towards biobased polymers. *Prog. Polym. Sci.* **2014**, *39*, 1266–1290. [[CrossRef](#)]
196. Ten, E.; Vermerris, W. Recent developments in polymers derived from industrial lignin. *J. Appl. Polym. Sci.* **2015**, *132*. [[CrossRef](#)]
197. Harvey, B.G.; Guenther, A.J.; Lai, W.W.; Meylemans, H.A.; Davis, M.C.; Cambrea, L.R.; Reams, J.T.; Lamison, K.R. Effects of o-methoxy groups on the properties and thermal stability of renewable high-temperature cyanate ester resins. *Macromolecules* **2015**, *48*, 3173–3179. [[CrossRef](#)]
198. Meylemans, H.A.; Groshens, T.J.; Harvey, B.G. Synthesis of renewable bisphenols from creosol. *ChemSusChem* **2012**, *5*, 206–210. [[CrossRef](#)] [[PubMed](#)]
199. Pion, F.; Ducrot, P.H.; Allais, F. Renewable alternating aliphatic-aromatic copolyesters derived from biobased ferulic acid, diols, and diacids: Sustainable polymers with tunable thermal properties. *Macromol. Chem. Phys.* **2014**, *215*, 431–439. [[CrossRef](#)]
200. Firdaus, M.; Meier, M.A.R. Renewable co-polymers derived from vanillin and fatty acid derivatives. *Eur. Polym. J.* **2013**, *49*, 156–166. [[CrossRef](#)]
201. Mialon, L.; Vanderhenst, R.; Pemba, A.G.; Miller, S.A. Polyalkylenehydroxybenzoates (pahbs): Biorenewable aromatic/aliphatic polyesters from lignin. *Macromol. Rapid Commun.* **2011**, *32*, 1386–1392. [[CrossRef](#)] [[PubMed](#)]
202. Mialon, L.; Pemba, A.G.; Miller, S.A. Biorenewable polyethylene terephthalate mimics derived from lignin and acetic acid. *Green Chem.* **2010**, *12*, 1704–1706. [[CrossRef](#)]
203. Aouf, C.; Lecomte, J.; Villeneuve, P.; Dubreucq, E.; Fulcrand, H. Chemo-enzymatic functionalization of gallic and vanillic acids: Synthesis of bio-based epoxy resins prepolymers. *Green Chem.* **2012**, *14*, 2328–2336. [[CrossRef](#)]
204. Fache, M.; Boutevin, B.; Caillol, S. Vanillin, a key-intermediate of biobased polymers. *Eur. Polym. J.* **2015**, *68*, 488–502. [[CrossRef](#)]
205. Fache, M.; Darroman, E.; Besse, V.; Auvergne, R.; Caillol, S.; Boutevin, B. Vanillin, a promising biobased building-block for monomer synthesis. *Green Chem.* **2014**, *16*, 1987–1998. [[CrossRef](#)]
206. Thring, R.W.; Breau, J. Hydrocracking of solvolysis lignin in a batch reactor. *Fuel* **1996**, *75*, 795–800. [[CrossRef](#)]
207. Sharma, R.K.; Bakhshi, N.N. Upgrading of wood-derived bio-oil over HZSM-5. *Bioresour. Technol.* **1991**, *35*, 57–66. [[CrossRef](#)]
208. Sharma, R.K.; Bakhshi, N.N. Catalytic upgrading of fast pyrolysis oil over HZSM-5. *Can. J. Chem. Eng.* **1993**, *71*, 383–391. [[CrossRef](#)]
209. Adjaye, J.D.; Bakhshi, N.N. Production of hydrocarbons by catalytic upgrading of a fast pyrolysis bio-oil.1. Conversion over various catalysts. *Fuel Process. Technol.* **1995**, *45*, 161–183. [[CrossRef](#)]
210. Adjaye, J.D.; Bakhshi, N.N. Production of hydrocarbons by catalytic upgrading of a fast pyrolysis bio-oil.2. Comparative catalyst performance and reaction pathways. *Fuel Process. Technol.* **1995**, *45*, 185–202. [[CrossRef](#)]
211. Chantal, P.; Kaliaguine, S.; Grandmaison, J.L.; Mahay, A. Production of hydrocarbons from aspen poplar pyrolytic oils over HZSM-5. *Appl. Catal.* **1984**, *10*, 317–332. [[CrossRef](#)]
212. Gayubo, A.G.; Aguayo, A.T.; Atutxa, A.; Aguado, R.; Bilbao, J. Transformation of oxygenate components of biomass pyrolysis oil on a HZSM-5 zeolite. I. Alcohols and phenols. *Ind. Eng. Chem. Res.* **2004**, *43*, 2610–2618. [[CrossRef](#)]
213. Sheu, Y.H.E.; Anthony, R.G.; Soltes, E.J. Kinetic-studies of upgrading pine pyrolytic oil by hydrotreatment. *Fuel Process. Technol.* **1988**, *19*, 31–50. [[CrossRef](#)]
214. Bredenberg, J.B.S.; Huuska, M.; Raty, J.; Korpio, M. Hydrogenolysis and hydrocracking of the carbon oxygen bond 1. Hydrocracking of some simple aromatic o-compounds. *J. Catal.* **1982**, *77*, 242–247. [[CrossRef](#)]
215. Gevert, B.S.; Otterstedt, J.E.; Massoth, F.E. Kinetics of the HDO of methyl-substituted phenols. *Appl. Catal.* **1987**, *31*, 119–131. [[CrossRef](#)]
216. Hurff, S.J.; Klein, M.T. Reaction pathway analysis of thermal and catalytic lignin fragmentation by use of model compounds. *Ind. Eng. Chem. Fundam.* **1983**, *22*, 426–430. [[CrossRef](#)]

217. Kallury, R.; Restivo, W.M.; Tidwell, T.T.; Boocock, D.G.B.; Crimi, A.; Douglas, J. Hydrodeoxygenation of hydroxy, methoxy, and methyl phenols with molybdenum oxide nickel-oxide alumina catalyst. *J. Catal.* **1985**, *96*, 535–543. [[CrossRef](#)]
218. Laurent, E.; Delmon, B. Study of the hydrodeoxygenation of carbonyl, carboxylic and guaiacyl groups over sulfided como/ γ - Al_2O_3 and nimo/ γ - Al_2O_3 catalyst.2. Influence of water, ammonia and hydrogen-sulfide. *Appl. Catal. A Gen.* **1994**, *109*, 97–115. [[CrossRef](#)]
219. De la Puente, G.; Gil, A.; Pis, J.J.; Grange, P. Effects of support surface chemistry in hydrodeoxygenation reactions over como/activated carbon sulfided catalysts. *Langmuir* **1999**, *15*, 5800–5806. [[CrossRef](#)]
220. Petrocelli, F.P.; Klein, M.T. Chemical modeling analysis of the yields of single-ring phenolics from lignin liquefaction. *Ind. Eng. Chem. Prod. Res. Dev.* **1985**, *24*, 635–641. [[CrossRef](#)]
221. Koyama, M. Hydrocracking of lignin-related model dimers. *Bioresour. Technol.* **1993**, *44*, 209–215. [[CrossRef](#)]
222. Ratcliff, M.A.; Johnson, D.K.; Posey, F.L.; Chum, H.L. Hydrodeoxygenation of lignins and model compounds. *Appl. Biochem. Biotechnol.* **1988**, *17*, 151–160. [[CrossRef](#)]
223. Yakovlev, V.A.; Khromova, S.A.; Sherstyuk, O.V.; Dundich, V.O.; Ermakov, D.Y.; Novopashina, V.M.; Lebedev, M.Y.; Bulavchenko, O.; Parmon, V.N. Development of new catalytic systems for upgraded bio-fuels production from bio-crude-oil and biodiesel. *Catal. Today* **2009**, *144*, 362–366. [[CrossRef](#)]
224. Elliott, D.C. Historical developments in hydroprocessing bio-oils. *Energy Fuels* **2007**, *21*, 1792–1815. [[CrossRef](#)]
225. Zhao, C.; Kou, Y.; Lemonidou, A.A.; Li, X.; Lercher, J.A. Highly selective catalytic conversion of phenolic bio-oil to alkanes. *Angew. Chem. Int. Ed.* **2009**, *48*, 3987–3990. [[CrossRef](#)] [[PubMed](#)]
226. Filley, J.; Roth, C. Vanadium catalyzed guaiacol deoxygenation. *J. Mol. Catal. A Chem.* **1999**, *139*, 245–252. [[CrossRef](#)]
227. Dabo, P.; Cyr, A.; Lessard, J.; Brossard, L.; Menard, H. Electrocatalytic hydrogenation of 4-phenoxyphenol on active powders highly dispersed in a reticulated vitreous carbon electrode. *Can. J. Chem./Rev. Can. Chim.* **1999**, *77*, 1225–1229. [[CrossRef](#)]
228. Hu, T.Q.; James, B.R.; Rettig, S.J.; Lee, C.L. Stereoselective hydrogenation of lignin degradation model compounds. *Can. J. Chem./Revue Canadienne Chimie* **1997**, *75*, 1234–1239. [[CrossRef](#)]
229. Crestini, C.; Pro, P.; Neri, V.; Saladino, R. Methyltrioxorhenium: A new catalyst for the activation of hydrogen peroxide to the oxidation of lignin and lignin model compounds. *Bioorg. Med. Chem.* **2005**, *13*, 2569–2578. [[CrossRef](#)] [[PubMed](#)]
230. Crestini, C.; Caponi, M.C.; Argyropoulos, D.S.; Saladino, R. Immobilized methyltrioxo rhenium (mto)/ H_2O_2 systems for the oxidation of lignin and lignin model compounds. *Bioorg. Med. Chem.* **2006**, *14*, 5292–5302. [[CrossRef](#)] [[PubMed](#)]
231. Herrmann, W.A.; Weskamp, T.; Zoller, J.P.; Fischer, R.W. Methyltrioxorhenium: Oxidative cleavage of cc-double bonds and its application in a highly efficient synthesis of vanillin from biological waste. *J. Mol. Catal. A Chem.* **2000**, *153*, 49–52. [[CrossRef](#)]
232. Bhargava, S.; Jani, H.; Tardio, J.; Akolekar, D.; Hoang, M. Catalytic wet oxidation of ferulic acid (a model lignin compound) using heterogeneous copper catalysts. *Ind. Eng. Chem. Res.* **2007**, *46*, 8652–8656. [[CrossRef](#)]
233. Pardini, V.L.; Vargas, R.R.; Viertler, H.; Utley, J.H.P. Anodic cleavage of lignin model dimers in methanol. *Tetrahedron* **1992**, *48*, 7221–7228. [[CrossRef](#)]
234. Habe, T.; Shimada, M.; Higuchi, T. Biomimetic approach to lignin degradation.1. H_2O_2 -dependent c-c bond-cleavage of the lignin model compounds with a natural iron porphyrin and imidazole complex. *Mokuzai Gakkaishi* **1985**, *31*, 54–55.
235. Crestini, C.; Pastorini, A.; Tagliatesta, P. Metalloporphyrins immobilized on motmorillonite as biomimetic catalysts in the oxidation of lignin model compounds. *J. Mol. Catal. A Chem.* **2004**, *208*, 195–202. [[CrossRef](#)]
236. Amaral Labat, G.A.; Goncalves, A.R. Oxidation in acidic medium of lignins from agricultural residues. *Appl. Biochem. Biotechnol.* **2008**, *148*, 151–161. [[CrossRef](#)] [[PubMed](#)]
237. Zhu, W.M.; Ford, W.T. Oxidation of lignin model compounds in water with dioxygen and hydrogen-peroxide catalyzed by metallophthalocyanines. *J. Mol. Catal.* **1993**, *78*, 367–378. [[CrossRef](#)]
238. Artaud, I.; Benaziza, K.; Mansuy, D. Iron porphyrin-catalyzed oxidation of 1,2-dimethoxyarenes—A discussion of the different reactions involved and the competition between the formation of methoxyquinones or muconic dimethyl esters. *J. Org. Chem.* **1993**, *58*, 3373–3380. [[CrossRef](#)]

239. Robinson, M.J.; Wright, L.J.; Suckling, I.D. Fe(tspc)-catalysed benzylic oxidation and subsequent dealkylation of a non-phenolic lignin model. *J. Wood Chem. Technol.* **2000**, *20*, 357–373. [[CrossRef](#)]
240. Dicosimo, R.; Szabo, H.C. Oxidation of lignin model compounds using single-electron-transfer catalysts. *J. Org. Chem.* **1988**, *53*, 1673–1679. [[CrossRef](#)]
241. Hocking, M. Vanillin: Synthetic flavoring from spent sulfite liquor. *J. Chem. Educ.* **1997**, *74*, 1055. [[CrossRef](#)]
242. Davis, R.; Tao, L.; Tan, E.C.D.; Bidy, M.J.; Beckham, G.T.; Scarlata, C.; Jacobson, J.; Cafferty, K.; Ross, J.; Lukas, J.; et al. *Process Design and Economics for the Conversion of Lignocellulosic Biomass to Hydrocarbons: Dilute-Acid and Enzymatic Deconstruction of Biomass to Sugars and Biological Conversion of Sugars to Hydrocarbons*; National Renewable Energy Laboratory: Golden, CO, USA, 2013.
243. Kautto, J.; Realf, M.J.; Ragauskas, A.J.; Kassi, T. Economic analysis of an organosolv process for bioethanol production. *Bioresources* **2014**, *9*, 6041–6072. [[CrossRef](#)]
244. Oleskowicz-Popiel, P.; Klein-Marcuschamer, D.; Simmons, B.A.; Blanch, H.W. Lignocellulosic ethanol production without enzymes—Technoeconomic analysis of ionic liquid pretreatment followed by acidolysis. *Bioresour. Technol.* **2014**, *158*, 294–299. [[CrossRef](#)] [[PubMed](#)]
245. Chen, H.; Fu, X. Industrial technologies for bioethanol production from lignocellulosic biomass. *Renew. Sustain. Energy Rev.* **2016**, *57*, 468–478. [[CrossRef](#)]
246. Petrou, E.C.; Pappis, C.P. Sustainability of systems producing ethanol, power, and lignosulfonates or lignin from corn stover: A comparative assessment. *ACS Sustain. Chem. Eng.* **2014**, *2*, 2527–2535. [[CrossRef](#)]
247. Pourhashem, G.; Adler, P.R.; McAloon, A.J.; Spatari, S. Cost and greenhouse gas emission tradeoffs of alternative uses of lignin for second generation ethanol. *Environ. Res. Lett.* **2013**, *8*, 025021. [[CrossRef](#)]



© 2016 by the authors; licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC-BY) license (<http://creativecommons.org/licenses/by/4.0/>).